

Panel-mounted timers


MBA (Ø 22 mm) with solid state output



- Panel-mounted pushbutton-type timer
- Function A delay on energisation
- 10 timing ranges :
0.05 s to 60 min.
- Supply 24 V DC and 110 • 240 V AC/DC
50 • 60 Hz
- Fast adjustment of timing period on
PLCs (compatible with IEC 1131)
- IP 65

Timing range : 0.1 s to 10 min
 Nominal current : 200 mA
 Display of output state by 2 LEDs
 Dimensions (mm) : 62 - Ø22
 Operating temperature : -20 C + 60 C
 Protection according to NFC 20010 - IEC 529 -
 DIN 40050 : IP65
 Conformity to standards IEC 255 / IEC 801.4 /
 IEC 1131 - VDE 0435
 Weight : 20 g

To order




Type	Functions	Voltages	Timing	Part number
MBA	Mono-function A	24 VDC	0.5 s • 10 s	88 901 122
	Mono-function A	24 VDC	1.5 s • 30 s	88 901 132
	Mono-function A	24 VDC	3 s • 60 s	88 901 142
	Mono-function A	24 VDC	0.5 min • 10 min	88 901 172
	Mono-function A	110 • 240 V AC/DC (50/60 Hz)	1.5 s • 30 s	88 901 138
	Mono-function A	110 • 240 V AC/DC (50/60 Hz)	0.5 min • 10 min	88 901 178



Other timing are available; please contact us for details.


Function A

Delay on energisation

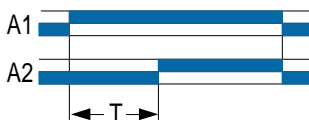


Version 24 V

On relay

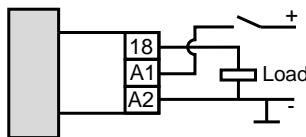

On PLC

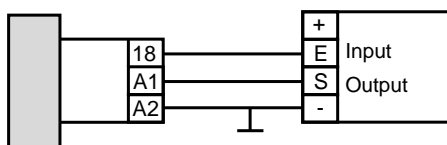

Version 110 • 240 V - 50/60 Hz

