

Controller FT1A

SmartAXIS

ATM Electronic

Klein Hesebecker Str. 4

D 29549 Bad Bevensen

Tel. 02166 958545 Fax 02166 958547 eMail: service@atm-electronic.de internet: <http://idec.eu.com>



Touch

Touch is an advanced, 3.8-inch display with integrated control and monitor functions (same functionality as Lite 12-I/O type).



Pro

Compact, easy-to-use controller.
Independent dual axis, high-speed counter, and interrupt input are available.
Pro is equipped with an LCD



Lite

Compact, easy-to-use controller.
Independent dual axis, high-speed counter, and interrupt input are available.
Lite is a controller without an LCD.

SmartAXIS Touch

Save installation space, wire, and time.



Control Functions

Fast Processing Speed

Stable and efficient processing

Basic instructions processing time: 1850µs/1000 steps. Fast processing time is available in the integrated control function.

10A Relay

No external relay, reducing wiring

Max. 10A output enables direct operation of solenoid valves. No additional circuit necessary to connect a relay, reducing wiring.

Memory

Large memory size enables stress-free programming of easy-to-see screen

Stress-free programming with large memory size - 47.4kB program size (when using ladder program. FBD: 38kB) and 5MB configuration memory capacity.

*1) System software version V4.05 or later (47.4kB with V4.04 or earlier)

USB Flash Drive

Easy log data saving


Integrated data logging function using an USB memory. Programs can also be changed easily.

High Speed

High-speed counter

Fast counter (single-phase 10 kHz/4 point, two-phase 5 kHz/1 point).

Structure

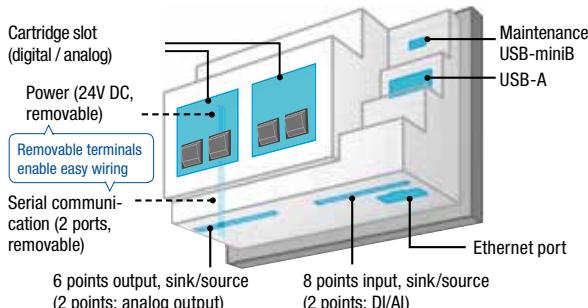

Display Functions

Color LCD

65,536-color high-resolution TFT LCD

Brightest LCD in its class. Compact screen with unparalleled visibility.



Mono-chrome

Backlit with pink, red, or white colors

Check the system status easily with the super-bright display with pink, red, or white backlight. Displays the same level of brightness as the color LCD models.



Different error levels can be displayed.

Fast start-up

Stress-free, 3-second start-up

Fast start-up allows for easy debugging and stress-free operation.

32-level Brightness Adjustment

LED backlight dimming control

The brightness of the backlight can be adjusted according to surrounding conditions (day/night), saving energy.

Rear Mount Adapter

Flexible system design with rear mount adapter

An adapter to rear mount the Touch. Choose the most suitable mounting method to mount on the equipment.

(The customer should prepare the panel surface sheet and panel cut-out.)



SmartAXIS Pro/Lite

Controls for various applications



Fast Processing Speed

Stable and efficient processing

Basic instructions processing time: 950µs/1000 steps

Memory

Large memory size for easy-to-see screen

Large program memory (12 I/O: 12 kB^{*1}, 24 I/O and up: 47.4 kB^{*2}) achieves reduction of development processes.

*1: When using ladder program. FBD: 10kB

*2: When using ladder program. FBD: 38kB

High Speed Counter

Positioning control possible with only one controller

Supports positioning control with a single-phase (100 kHz)/4 point or a single-phase (100 kHz)/two-phase (50 kHz)/2 point high-speed counter input. Ideal for easy positioning or motor control using a rotary encoder. Equipped with 6 points for interrupt input, catch input, and frequency input.

SD Memory Card

Easy log data saving

Data can be saved or transferred by using an SD memory card. Saved data can be read via Ethernet. Up to 64 data registers can be saved at the same time. Can store up to 4 data per second (depends on the program processing speed.)



10A Relay

No external relay, reducing wiring

10A output relays connect directly to small motors and solenoid valves. No additional circuit necessary to connect a relay, reducing wiring.



High-speed Output

Built-in biaxial positioning function


Independent dual-axis control is performed using two pulse outputs. Locational values can be easily defined for precise position (trapezoidal) control.

Memory Cartridge

Easy maintenance, no PC required.

User programs can be read or written easily, reducing labor. When a memory cartridge is installed in the SmartAXIS, the user program stored in the memory cartridge is executed.

Structure

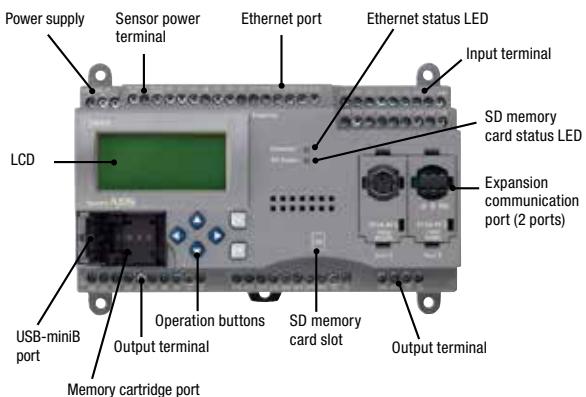

SmartAXIS Touch/Pro/Lite

I/O Monitor

"I/O status monitor" screen for monitoring I/O status


The monitor screens on LCD show ON/OFF status of I/Os (Touch/Pro only), enabling quick I/O status monitoring when error occurs.



Device Monitor

Easy and quick program change

Parameters can be confirmed/checked using the device monitor function of Pro/Touch (monitoring FBD is not possible).

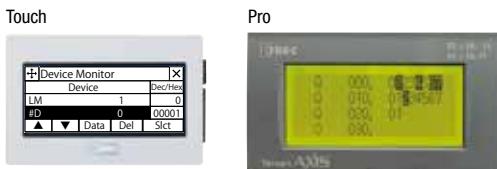

Clock


Easy time schedule control using "Clock Function"

Clock function enables you to automatically control the time schedule for systems such as lighting or water sprinkler.

Efficiency

Digital/analog (0 to 10V DC) compatible input

External analog potentiometer makes it easy to set the timer. Suitable for applications requiring a few analog inputs. (Pro/ Lite: DC power model only)

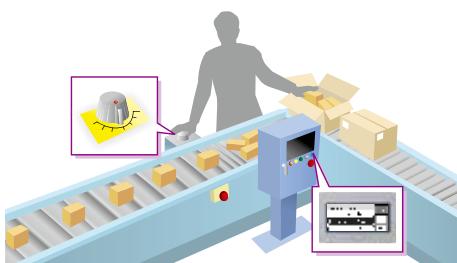

Security

Password protection for secure system operation

Protect systems and programs using a password.




Ladder Monitor

Easy troubleshooting

Easy ladder program monitoring using 4 buttons. Parameters on monitor screens can be checked and changed easily. (Touch/Pro only) (monitor function is not possible with FBD.)

Touch



Pro



Inputs from the operation buttons can be programmed as digital inputs. No external device necessary for checking the programs.

Online Monitor

Easy set-up


Debugging is possible by connecting the SmartAXIS with WindLDR or WindO/I-N3.



Ethernet

Remote maintenance


The user program can be downloaded to/uploaded from the SmartAXIS at remote locations via Ethernet (except 12 I/O type of Pro/Lite).

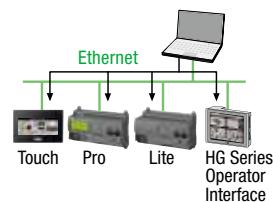

Front Panel Maintenance

Easy data maintenance, shortening setup and adjustment time.

Using a panel mount extension cable, data can be transferred without opening the panel. Debugging of ladder program in the controller is also possible (Touch only).

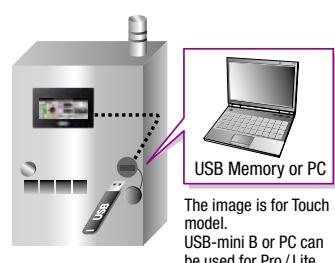

The image is for Touch model.
USB-mini B or PC can be used for Pro / Lite.

Operator Interface

Connection to Operator Interface

Pro/Lite can be connected to IDEC's HG series operator interface for powerful expressivity and rich information.



Photo: HG3G Operator Interface


SmartAXIS Pro/Lite

Positioning


Multistage Control

Independent dual-axis control is possible using two pulse outputs. Positioning (ramp-up/down control) can be achieved easily by setting the required values. (Pro/Lite pulse output model only)


For applicable models, see L-055 & L-056 ►

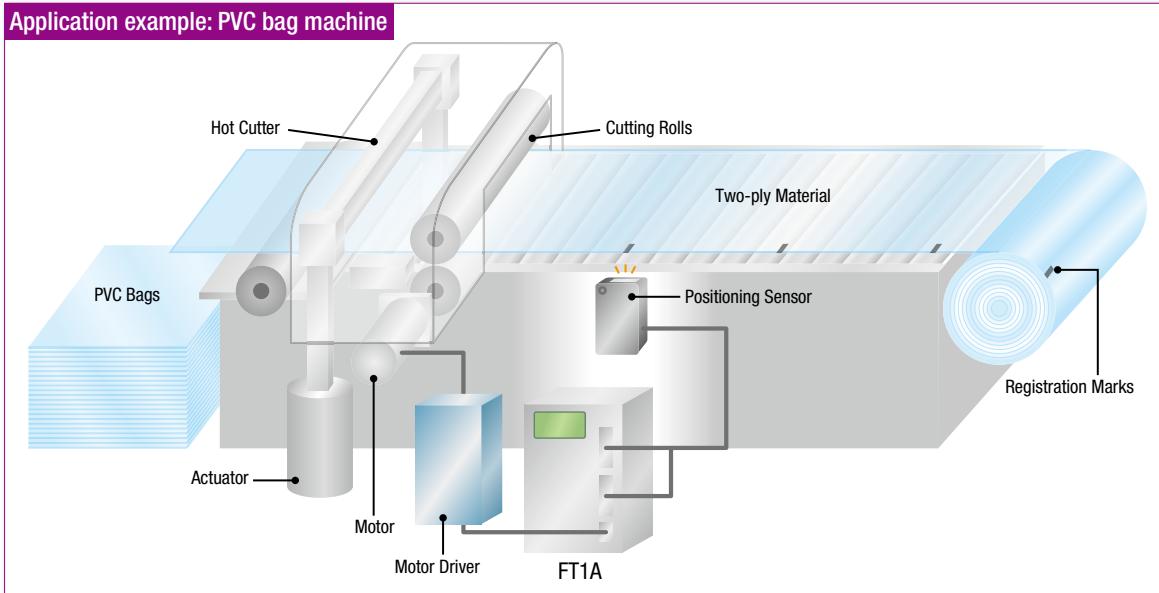

WindLDR: setting screen with preview

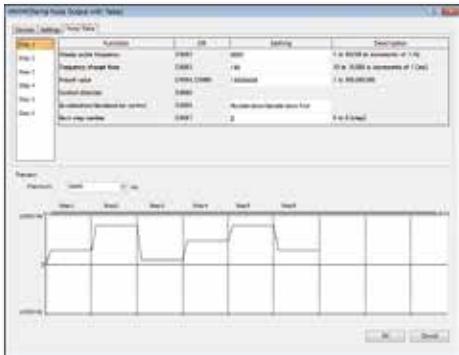

Target frequency change programmable for 18 steps maximum

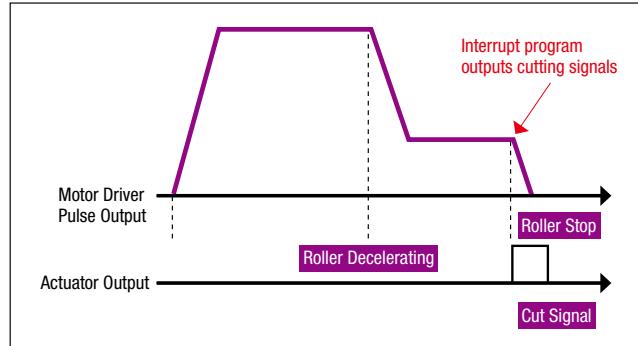

Various Application Examples

SmartAXIS is suitable for various applications.

Applications	Functions	10A Relay	Analog Input	Calendar	Pulse Output	Data Logging	Ethernet Communication	User Communication	USB Communication
Elevator Control	●				●				
Drain Pumps	●	●		●		●	●		
Water Server	●					●		●	
Coffee Server	●	●							
Vending Machine	●	●				●			
Sprinkler	●			●				●	
Mist Generator		●		●					
Greenhouse Control		●		●		●	●		
Coin-operated Shower	●	●			●	●			
Golf Ball Feeder					●	●			
System Status Collection						●	●		
Barcode Reader						●		●	●


SmartAXIS Network

Various Networks for a Wide Variety of Applications

(Except for 12 I/O type of Pro/Lite)


User Communication

The user communication of the SmartAXIS enables you to control external devices such as PCs, printers, and barcode readers.

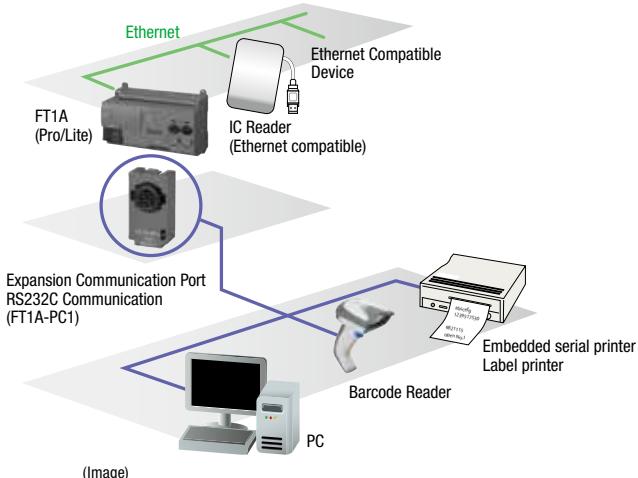

Modbus RTU Communication

The SmartAXIS is compliant with Modbus protocol and can be used as either a Modbus communication master or slave. When used as a Modbus master, the SmartAXIS can monitor and modify data of Modbus compliant devices such as inverters and temperature controllers using Modbus communication (Touch can be used as a master only).

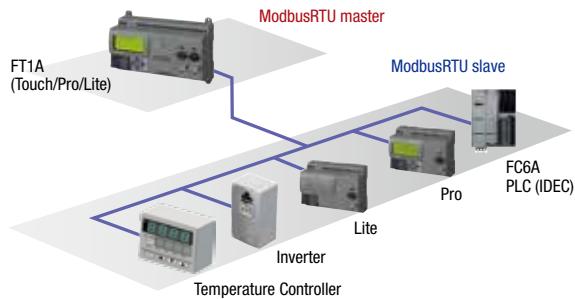


Modbus TCP

The SmartAXIS supports Modbus communications protocols. Modbus TCP protocol can also be used on the built-in Ethernet port, and can be used as a client (master) or server (slave), to monitor and change data of devices such as inverters and temperature controllers.


Note: When Pro/Lite is the client (master): up to 3 servers (slaves) can be connected.

When Touch is the client (master): up to 16 servers (slaves) can be connected.

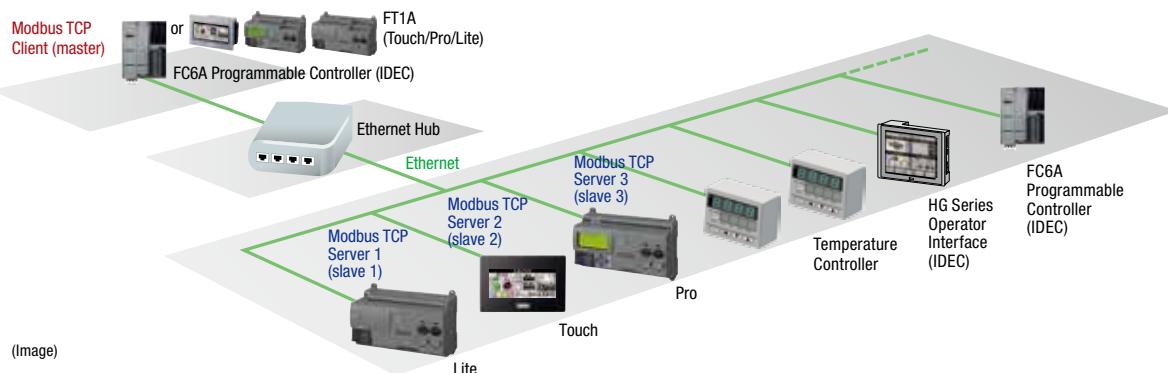

Remote I/O

The remote I/O of the SmartAXIS enables you to expand the number of inputs and outputs by connecting separate SmartAXIS modules over Ethernet as remote I/O slaves. The total number of I/Os can be expanded up to 144 I/Os. The SmartAXIS remote I/O master can use the analog inputs on the remote I/O slaves (Pro/Lite only).

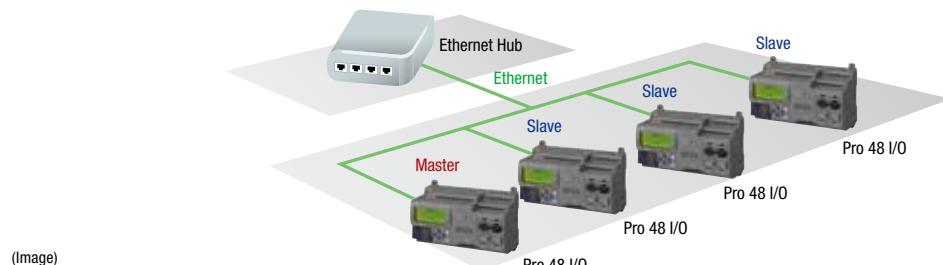

SmartAXIS Selection Guide

Specifications		Touch			Pro												
		 		  													
		12	14	12		24		40									
Part Number		FT1A-*12RA-□	FT1A-*14KA-□	FT1A-*14SA-□	FT1A-H12RA	FT1A-H12RC	FT1A-H24RA	FT1A-H24RC	FT1A-H40RKA	FT1A-H40RSA	FT1A-H40RC						
Power Voltage		24V DC			24V DC	100-240V AC	24V DC	100-240V AC	24V DC	24V DC	100-240V AC						
I/O Points	No. of inputs	Digital		Sink 6 points	Source 6 points	Sink 6 points	6 points	8 points	12 points	16 points	18 points	18 points	24 points				
		Analog		2pt (0-10VDC, 10-bit Resolution)	2pt (0-10VDC, 4-20mA, 10-bit Resolution)	—	2 points	—	4 points	—	6 points	6 points	—				
	No. of outputs	Relay output	10A relay	4 points	—	—	4 points	4 points	4 points	4 points	4 points	4 points	4 points				
			2A relay	—	—	—	—	—	4 points	4 points	8 points	8 points	12 points				
	Transistor (sink output)		—	4 points	—	—	—	—	—	—	4 points	—	—				
	Transistor (source output)		—	—	4 points	—	—	—	—	—	—	4 points	—				
Analog output		—	2 points	2 points	—	—	—	—	—	—	—	—	—				
Maximum Expansion I/O Points	Analog input/ Analog output (*6)		2/0 points	2/6 points 4/4 points 6/2 points	2/6 points 4/4 points 6/2 points	—	—	—	—	—	—	—	—				
Ladder Program	Program Capacity		94.8kB (23,700 steps equivalent) (*5) Configuration Memory Capacity: 5MB			12kB (3,000 steps equivalent)		47.4kB (11,850 steps equivalent)									
	Instructions Processing Time	Basic Instruction Time	1,850µs/1,000 steps			950µs/1,000 steps											
FBD		END Processing	5ms minimum			2ms											
Program Capacity		Program Size: 38kB Configuration Memory Size: 5MB			10kB		38kB										
(Maximum Counter Frequency and Points)	Instructions Processing Time	Instruction Time	4ms/100 points			1.3ms/100 points											
		Scan End Processing	5ms minimum			2.5ms											
(Maximum Counter Frequency and Points)	Single/two-phase selectable	1 point (5kHz, 2/4-edge, no single-phase use)		2 points (*1)	—	2 points (*1)	—	2 points (*1)	—	2 points (*1)	—						
		Single-phase		4 points (×10kHz)		2 points (×100kHz)	—	4 points (×100kHz)	—	4 points (×100kHz)	—						
Pulse Output	100kHz		—			—	—	—	—	2 points	2 points	—	—				
	5kHz		—			—	—	—	—	2 points	2 points	—	—				
Interface	USB Port		2 (USB-A, USB-miniB) (*2)			1 (*2)	1 (*2)	1 (*2)									
	Ethernet		1			—	1	1									
	Expansion Communication Ports		—			—	1	2									
	RS232C	1		—			1 max. (*3)	2 max. (*3)									
		RS422/485		1			—	1 max. (*3)	2 max. (*3)								
	SD Memory Card		—			—	—	1 (*4)									
	Memory Cartridge		—			1	1	1									
USB Memory		○			—			—									
Clock Function		○			○			○									
LCD		TFT color (65,536 colors) STN monochrome (pink/red/white backlight)			○ (STN monochrome)	○ (STN monochrome)	○ (STN monochrome)	○ (STN monochrome)									

* LCD: M (STN monochrome), C (TFT color) □ Bezel color: W (light gray), B (dark gray), S (silver)

*1) Single-phase: 100kHz, two-phase: 50kHz, 2/4-edge

*3) When expansion communication cartridge is installed.

*5) Touch system software version V4.05 or later (47.4kB with V4.04 or earlier) (11,850 steps equivalent)

*2) USB-miniB (maintenance port)

*4) SD memory card: 32GB max.

*6) Depends on the cartridge combination.

	Pro				Lite														
					   														
	48				12		24		40			48							
FT1A-H48KA	FT1A-H48SA	FT1A-H48KC	FT1A-H48SC	FT1A-B12RA	FT1A-B12RC	FT1A-B24RA	FT1A-B24RC	FT1A-B40RKA	FT1A-B40RSA	FT1A-B40RC	FT1A-B48KA	FT1A-B48SA	FT1A-B48KC	FT1A-B48SC					
24V DC	24V DC	100-240V AC	100-240V AC	24V DC	100-240V AC	24V DC	100-240V AC	24V DC	24V DC	100-240V AC	24V DC	24V DC	100-240V AC	100-240V AC					
22 points	22 points	30 points	30 points	6 points	8 points	12 points	16 points	18 points	18 points	24 points	22 points	22 points	30 points	30 points					
8 points	8 points	—	—	2 points	—	4 points	—	6 points	6 points	—	8 points	8 points	—	—					
—	—	—	—	4 points	4 points	4 points	4 points	4 points	4 points	4 points	—	—	—	—					
—	—	—	—	—	—	4 points	4 points	8 points	8 points	12 points	—	—	—	—					
18 points	—	18 points	—	—	—	—	—	4 points	—	—	18 points	—	18 points	—					
—	18 points	—	18 points	—	—	—	—	—	4 points	—	—	18 points	—	18 points					
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—					
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—					
47.4kB (11,850 steps equivalent)				12kB (3,000 steps equivalent)		47.4kB (11,850 steps equivalent)													
950µs/1,000 steps				950µs/1,000 steps															
2ms				640µs															
38kB				10kB		38kB													
1.3ms/100 points				1.3ms/100 points															
2.5ms				1ms															
2 points (*1)	—	2 points (*1)	—	2 points (*1)	—	2 points (*1)	—	2 points (*1)	—	2 points (*1)	—	—	—						
4 points (x100kHz)	—	2 points (x100kHz)	—	4 points (x100kHz)	—	4 points (x100kHz)	—	4 points (x100kHz)	—	4 points (x100kHz)	—	—	—						
2 points	2 points	2 points	2 points	—	—	2 points	2 points	—	2 points	2 points	2 points	2 points	2 points						
2 points	2 points	2 points	2 points	—	—	2 points	2 points	—	2 points	2 points	2 points	2 points	2 points						
1 (*2)				1 (*2)		1 (*2)		1 (*2)			1 (*2)								
1				—		1		1			1								
2				—		1		2			2								
2 max. (*3)				—		1 max. (*3)		2 max. (*3)			2 max. (*3)								
2 max. (*3)				—		1 max. (*3)		2 max. (*3)			2 max. (*3)								
1 (*4)				—		—		1 (*4)			1 (*4)								
1				1		1		1			1								
—				—		—		—			—								
○				○		○		○			○								
○ (STN monochrome)				—		—		—			—								

SmartAXIS Series FT1A Controller

FT1A

Touch (Display Models)

Type	Power	I/O	Input		Output	Program Size (ladder/FBD)	Interfaces	LCD	Bezel Color	Part No.	Package Quantity: 1	
			Digital I/O	Analog I/O (*1)								
Relay Output	24V DC	12 points (8/4)	6 (sink) (24V DC)	2	4 points 10A relay output	Program size: 94.8 (*3)/38kB Configuration memory size: 5 MB	USB-A USB-mini B RS232C RS422/485 Ethernet	STN monochrome	Light gray	FT1A-M12RA-W		
			6 (source) (24V DC)	2	4 points Tr. sink output 2 points analog output				Dark gray	FT1A-M12RA-B		
		14 points (8/6)	6 (sink) (24V DC)	2	4 points Tr. source output 2 points analog output				Silver	FT1A-M12RA-S		
			6 (source) (24V DC)	2	4 points Tr. sink output 2 points analog output			TFT color	Light gray	FT1A-C12RA-W		
			6 (sink) (24V DC)	2	4 points Tr. source output 2 points analog output				Dark gray	FT1A-C12RA-B		
			6 (source) (24V DC)	2	4 points Tr. sink output 2 points analog output				Silver	FT1A-C12RA-S		
Transistor Output	24V DC	14 points (8/6)	6 (sink) (24V DC)	2	4 points Tr. source output 2 points analog output			STN monochrome	Light gray	FT1A-M14KA-W		
			6 (source) (24V DC)	2	4 points Tr. sink output 2 points analog output				Dark gray	FT1A-M14KA-B		
			6 (sink) (24V DC)	2	4 points Tr. source output 2 points analog output				Silver	FT1A-M14KA-S		
		12 points (8/4)	6 (source) (24V DC)	2	4 points Tr. sink output 2 points analog output			TFT color	Light gray	FT1A-M14SA-W		
			6 (sink) (24V DC)	2	4 points Tr. source output 2 points analog output				Dark gray	FT1A-M14SA-B		
			6 (source) (24V DC)	2	4 points Tr. sink output 2 points analog output				Silver	FT1A-M14SA-S		

Pro (LCD Models)

Power	I/O	Input		Output		High-Speed Tr. Output	Program Size (ladder/ FBD)	Interfaces				Part No.	Package Quantity: 1						
		Digital I/O	Analog I/O (*1)					USB mini-B Port	Ethernet Port	Expansion communica- tion port (*2)	Memory Car- tridge	SD Memory Card							
24V DC	12 points (8/4)	24V DC Input	6	2	4 points 10A relay output	— ○	12/10 kB	—	—	—	○	—	FT1A-H12RA FT1A-H24RA FT1A-H40RKA FT1A-H40RSA FT1A-H48KA FT1A-H48SA						
			12	4	4 points 10A relay output 4 points 2A relay output														
	24 points (16/8)		18	6	4 points 10A relay output 8 points 2A relay output 4 points Tr. source output		47.4/38 kB	○	○	○									
			22	8	18 points Tr. sink output 18 points Tr. source output														
	40 points (24/16)		8	—	4 points 10A relay output		12/10 kB	—	—	—									
			16		4 points 10A relay output 4 points 2A relay output														
100 to 240V AC	48 points (30/18)		24	—	4 points 10A relay output 12 points 2A relay output		47.4/38 kB	○	○	○									
			30		18 points Tr. sink output 18 points Tr. source output														

Lite (No LCD Models)

Power	I/O	Input		Output		High-Speed Tr. Output	Program Size (ladder/ FBD)	Interfaces				Part No.	Package Quantity: 1								
		Digital I/O	Analog I/O (*1)					USB mini-B Port	Ethernet Port	Expansion communica- tion port (*2)	Memory Car- tridge	SD Memory Card									
24V DC	12 points (8/4)	24V DC Input	6	2	4 points 10A relay output	— ○	12/10 kB	—	—	—	○	—	FT1A-B12RA FT1A-B24RA FT1A-B40RKA FT1A-B40RSA FT1A-B48KA FT1A-B48SA								
			12	4	4 points 10A relay output 4 points 2A relay output																
	24 points (16/8)		18	6	4 points 10A relay output 8 points 2A relay output 4 points Tr. source output		47.4/38 kB	○	○	○											
			22	8	18 points Tr. sink output 18 points Tr. source output																
	40 points (24/16)		8	—	4 points 10A relay output		12/10 kB	—	—	—											
			16		4 points 10A relay output 4 points 2A relay output																
100 to 240V AC	48 points (30/18)		24	—	4 points 10A relay output 12 points 2A relay output		47.4/38 kB	○	○	○											
			30		18 points Tr. sink output 18 points Tr. source output																

*1) Digital/analog-compatible input

*2) The following communication cartridges can be connected.

FT1A-PC1: RS232C, mini-DIN type, FT1A-PC2: RS485, mini-DIN type, FT1A-PC3: RS485, terminal block type

*3) Touch system software version V4.05 or later (47.4kB with V4.04 or earlier).

Options / Maintenance Parts

Options

Name/Appearance		Applicable Model			Part No. (Ordering No.)	Package Quantity	Specifications
		Touch	Pro	Lite			
Application software		○	○	○	SW1A-W1C	1	Automation Organizer Ver. 2.0 or higher (*1)
USB maintenance cable		○	○	○	HG9Z-XCM42	1	USB cable (length 2 m), USB-miniB
Panel mount extension cable	—	○	—	—	HG9Z-XCE11	1	USB-A port extension cable (length 1 m)
	—	○	○	○	HG9Z-XCE21	1	USB-mini B port extension cable (length 1 m)
Screen protection sheet (*2)		○	—	—	FT9Z-1D3PN05	5	
Protective cover		○	—	—	FT9Z-1E3PN05	5	
Memory card	(*3)	—	(*4)	(*4)	HG9Z-XMS2	1	SD memory card (2 GB)
Memory cartridge	—	—	○	○	FT1A-PM1	1	Dedicated user program save memory (1 MB)
Communication cartridge	PC1/PC2	—	○	○	FT1A-PC1	1	RS232C, mini-DIN type
	PC3	—	(*5)	(*5)	FT1A-PC2	1	RS485, mini-DIN type
	—	—	(*5)	(*5)	FT1A-PC3	1	RS485, terminal block type
Digital I/O Cartridge	Digital Input	○	(*5)	—	FC6A-PN4	1	4 (4/1 common)
	Digital Output	○	(*5)	—	FC6A-PTK4	1	4 sink (4/1 common)
	○	(*5)	—	—	FC6A-PTS4	1	4 source (4/1 common)
Analog cartridge	—	○	(*6)	—	FC6A-PJ2A	1	Voltage/current input (2 points)
	—	○	(*6)	—	FC6A-PK2AV	1	Voltage output (2 points)
	—	○	(*6)	—	FC6A-PK2AW	1	Current output (2 points)
	—	○	(*6)	—	FC6A-PJ2CP	1	Temperature input (2 points)
Rear mount adapter		○	—	—	FT9Z-1A01	1	Rear mount bracket
35-mm-wide DIN Rail	—	—	○	○	BAA1000PN10	10	See H-071 for details on DIN rail products.
	—	—	○	○	BAP1000PN10	10	
DIN rail end clip	—	—	○	○	BNL6PN10	10	
Touch User's Manual	Japanese	○	—	—	FT9Y-B1389	1	
	English	○	—	—	FT9Y-B1390	1	
Pro/Lite User's Manual	Japanese	—	○	○	FT9Y-B1377	1	
	English	—	○	○	FT9Y-B1378	1	
SmartAXIS Ladder Programming Manual	Japanese	○	○	○	FT9Y-B1381	1	
	English	○	○	○	FT9Y-B1382	1	
FBD Programming Manual	Japanese	○	○	○	FT9Y-B1385	1	
	English	○	○	○	FT9Y-B1386	1	

*1) Upgrade from earlier version is possible on IDEC website. The following manuals in PDF can be downloaded from <http://www.idec.com/language>.

FT1A SmartAXIS Touch User's Manual (English, Japanese, Simplified Chinese)

FT1A SmartAXIS Pro/Lite User's Manual (English, German, Japanese, Simplified Chinese)

FT1A SmartAXIS Ladder Programming Manual (English, German, Japanese, Simplified Chinese)

FT1A SmartAXIS FBD Programming Manual (English, German, Japanese, Simplified Chinese)

*2) UV resistance material is used. However, resistance against direct sunlight in outdoor usage is not guaranteed.

*3) Use commercially-available USB memory to store project data, log data, and recipe file of Touch models.

*4) Can be used for 40-I/O and 48-I/O types. Note that user programs cannot be stored or read using an SD memory card. If necessary, use a memory cartridge.

*5) Cannot be used for expansion with 12-I/O type.

*6) Cannot be used for expansion with relay output type.

Maintenance Parts

Name	Applicable Model (*1)			Part No. (Ordering No.)	Package Quantity	Specification
	Touch	Pro	Lite			
Communication Interface plug	○	—	—	FT9Z-1T09	1	For communication ports (black) One supplied with Touch
Power supply plug	○	—	—	FT9Z-1X03	1	For power supply terminals (black) One supplied with Touch
Mounting bracket	○	—	—	HG9Z-4K2PN04	4	Two sets Two supplied with Touch
USB cable lock pin	○	—	—	HG9Z-XU1PN05	5	Used when using the USB cable on a regular basis Two supplied with Touch
Direct mounting hook	—	○	○	FT9Z-PSP1PN05	5	Direct mounting hook for Pro/Lite One set supplied with Pro/Lite

*1) Supplied with FT1A.

General Specifications

Touch (Display Model)

Part No.	FT1A-*12RA-*	FT1A-*14KA-* / FT1A-*14SA-*
Output	Relay output	Transistor output
Rated Power Voltage/ Power Supply Isolation	24V DC/Not isolated	
Allowable Voltage Range	20.4 to 28.8V DC (including ripple)	
Power Consumption	9.2W maximum	11W maximum
Allowable Momentary Power Interruption	10 ms maximum	
Dielectric Strength	1. Between power terminal and FE terminal: 500V AC, 5 mA, 1 minute 2. Between power terminal and output terminal: 2,300V AC, 5 mA, 1 minute	1. Between power terminal and FE terminal: 500V AC, 5 mA, 1 minute 2. Between power terminal and output terminal: 500V AC, 5 mA, 1 minute
EMC Immunity	IEC/EN 61131-2:2007 compliant	
Inrush Current	50A maximum (5ms maximum)	
Operating Temperature	Color display: -20 to +55°C, Monochrome display: 0 to +55°C (*1) (*2)	
Storage Temperature	-20 to +60°C (no freezing)	
Relative Humidity	10 to 95% RH (no condensation)	
Pollution Degree	2 (IEC 60664-1)	
Corrosion Immunity	Atmosphere free from corrosive gases	
Degree of Protection	IP66F TYPE 4X TYPE 13 (Panel front) (*3), IP20 (Rear)	
Ground	Functional grounding	
Protective grounding conductor	UL1007 AWG16	
Vibration Resistance	5 to 8.4 Hz half amplitude 3.5 mm, 8.4 to 150 Hz, acceleration 9.8 m/s ² (1G), 2 hours per axis on each of three mutually perpendicular axis (IEC 61131-2)	
Shock Resistance	147 m/s ² , 11 ms, X, Y, Z directions 3 times (IEC 61131-2)	
Mounting Structure	Panel mount	
Weight (approx.)	300g	250g

*1) FT1A-*12RA-* hardware version V130 (indicated on hardware) and earlier is UL, c-UL listed at 50°C (maximum operating temperature).

*2) See SmartAXIS Touch User's Manual FT9Y-B1390(2) for I/O derating.

*3) Operation not guaranteed when used with certain types of oils.

Pro/Lite (LCD Model/No LCD Model)

Part No.	Pro/Lite										
	12-I/O Type		24-I/O Type		40-I/O Type		48-I/O Type				
	H12RA	H12RC	H24RA	H24RC	H40RKA	H40RSA	H40RC	H48KA	H48SA	H48KC	H48SC
Rated Power Voltage/Power Supply Isolation	AC power: 100 to 240V AC/Isolation with transformer DC power: 24V DC/Not isolated										
Allowable Voltage Range	AC power: 85 to 264V AC DC power: 20.4 to 28.8V DC (including ripple)										
Rated Power Frequency	AC power: 50 to 60 Hz (47 to 63 Hz)										
Power Consumption	AC power	12-I/O: 18 VA maximum, 24-I/O: 41 VA maximum, 40-I/O: 48VA maximum, 48-I/O: 43 VA maximum									
	DC power	12-I/O: 4.3W maximum, 24-I/O: 4.8W maximum, 40-I/O: 7.9W maximum, 48-I/O: 6.0W maximum									
Allowable Momentary Power Interruption	AC power: 20 ms maximum, DC power: 10 ms maximum										
Dielectric Strength	AC power type: Between power/input and PE terminals: 1,500V AC, 5mA, 1 minute Between transistor output and PE terminals: 1,500V AC, 5mA, 1 minute Between relay output and PE terminals: 2,300V AC, 5mA, 1 minute Between power and input terminals: 1,500V AC, 5mA, 1 minute Between power/input and transistor output terminals: 1,500V AC, 5mA, 1 minute Between power/input and relay output terminals: 2,300V AC, 5mA, 1 minute DC power type: Between power/input and FE terminals: 500V AC, 5mA, 1 minute Between transistor output and FE terminals: 500V AC, 5mA, 1 minute Between relay output and FE terminals: 2,300V AC, 5mA, 1 minute Between power/input and transistor output terminals: 500V AC, 5mA, 1 minute Between power/input and relay output terminals: 2,300V AC, 5mA, 1 minute										
EMC Immunity	IEC/EN 61131-2:2007 compliant										
Inrush Current	AC power: 35A maximum (Cold start with Ta=25°C, 200V AC) DC power: 30A maximum (5ms maximum)										
Operating Temperature	0 to +55°C (*1)										
Storage Temperature	-25 to +70°C (no freezing)										
Relative Humidity	10 to 95% RH (no condensation)										
Pollution Degree	2 (IEC 60664-1)										
Corrosion Immunity	Atmosphere free from corrosive gases										
Degree of Protection	IP20 (IEC 60529)										
Ground	D-type ground (Class 3 ground)										
Protective grounding conductor	UL1007 AWG16										
Vibration Resistance	5 to 8.4 Hz half amplitude 3.5 mm, 8.4 to 150 Hz, acceleration 9.8 m/s ² (1G), 2 hours per axis on each of three mutually perpendicular axis (IEC 61131-2)										
Shock Resistance	147 m/s ² , 11 ms, X, Y, Z directions 3 times (IEC 61131-2)										
Mounting Structure	DIN rail or direct mount										
Weight (approx.)	AC power	12-I/O: 230g, 24-I/O: 400g, 40-I/O: 580g, 48-I/O: 540g									
	DC power	12-I/O: 190g, 24-I/O: 310g, 40-I/O: 420g, 48-I/O: 380g									

*1) Hardware version V110 (indicated on hardware) is UL, c-UL Listed at 50°C (maximum operating temperature).

Function Specifications (Touch)

Part No.		Touch				
		FT1A-*12RA-*	FT1A-*14KA-*	FT1A-*14SA-*		
Control System		Stored program system				
Ladder Program	Instruction Words	Basic Instructions Advanced Instructions	42 types 98 types	99 types		
	Program Capacity		Program size: 94.8kB (23,700 steps equivalent)(*4), Configuration memory capacity: 5 MB			
	Processing Time	Basic Instruction END Processing	1850µs/1,000 steps 5 msec minimum			
	FB		37 types			
FB	Program Capacity		Program size: 38kB, configuration memory capacity: 5MB			
	No. of FB	FB (*1) Timer (T) Counter (C)	1,000 200 200			
	Processing Time	Basic Instruction END Processing	4ms/100 5ms minimum			
	User Program Storage		Flash ROM (100,000 times)			
I/O Points (*3)	Inputs		8 (90 max. can be added with remote I/O master function)	8 (90 max. can be added with remote I/O master function)		
	Outputs		4 (54 max. can be added with remote I/O master function)	4 (54 max. can be added with remote I/O master function)		
Analog Input (*3)		2 (24 max. can be added with remote I/O master function)	2 (4 max. can be added with analog cartridge, and 24 max. can be added with remote master function)			
Analog Output		—	2 (4 max. can be added with analog cartridge)			
Internal Relays		1,024				
Shift Registers		128				
Data Registers		2000				
Special Data Registers		200				
Counters		200				
Timer (1ms, 10 ms, 100 ms, 1s)		200				
Clock		Precision: ±30 seconds/month (25°C, typical)				
RAM Backup	Backup Data		Internal relays, shift registers, counters, data registers, clock data			
	Backup Duration		Approximately 30 days (typical) at 25°C after backup battery is fully charged			
	Battery		Lithium secondary battery			
	Charging Time		Approximately 15 hours required to charge from 0 to 90%			
	Replaceability		Not possible			
Self-Diagnostic Functions		Keep data check, power failure check, watchdog timer check, timer/counter preset value change error check, user program syntax check, user program execution check				
Input Filter		No filter, 3 to 15 ms (selectable in increments of 1 ms)				
Catch Input/Interrupt Input		4/4				
High-speed Counter	Maximum Counting Frequency and Points	Single/two-phase selectable	1 (5 kHz, multiple 2/4, single-phase cannot be used)			
	Single-phase		4 (x 10 kHz)			
	Counting Range		0 to 4,294,967,295 (32 bits)			
	Operation Mode		Rotary encoder mode and adding counter mode			
Analog Voltage Inputs	Built-in Points		2			
	Input Range		0 to 10V DC	0 to 10V DC (voltage input) /4 to 20 mA (current input)		
	Input Impedance		78 kΩ	78 kΩ (voltage input) / 250 Ω (current input)		
	Digital Resolution		0 to 1,000 (10 bits)			
Number of Relay Outputs		10A relay: 4	—	—		
Number of Transistor Outputs		—	4 (sink)	4 (source)		
Analog Output	Built-in Points		—	2		
	Output Range		0 to 10V DC (voltage output) /4 to 20 mA (current output)			
	Digital Resolution		0 to 1,000 (10 bits)			
Pulse Outputs	100 kHz	No. of outputs	—			
	Function		—			
	5 kHz	No. of outputs	—			
	Function		—			
External Output Power Supply for Sensor	Output Voltage		—			
	Output Current		—			
	Overload Detection		—			
	Insulation		—			
USB-mini B (*2)		—	○			
USB-A (*2)		—	○			
RS232C (*2)		—	○			
RS485/422 (*2)		—	○			
Ethernet		—	○			
Expansion Communication Ports	Port 2		—			
	Port 3		—			
Memory Cartridge		—				
SD Memory Card	Number of Ports		—	2		
	Connectable Cards		—	4 (FC6A-PJ2A, FC6A-PK2AV, FC6A-PK2AW, FC6A-PJ2CP)		

*1) Except for timer, counter, input FB, and output FB.

*2) Not isolated from internal circuits.

*3) FT1A-*12RA-*: system software V3.90 or later

*4) Touch system software version V4.05 or later (47.4KB with V4.04 or earlier)

Function Specifications (Pro/Lite)

Part No.		Pro/Lite FT1A-																
		H12RA B12RA	H12RC B12RC	H24RA B24RA	H24RC B24RC	H40RKA H40RSA B40RKA B40RSA	H40RC B40RC	H48KA H48SA B48KA B48SA	H48KC H48SC B48KC B48SC									
Control System		Stored program system																
Ladder Program	Instruction Words	Basic Instructions		42 types														
		Advanced Instructions		99 types	98 types	103 types	102 types	110 types	104 types									
Program Capacity		12 kB (3000 steps equivalent)		47.4 kB (11,850 steps equivalent)														
FBD	Processing Time	Basic Instruction		950 µs/1,000 steps														
		END Processing		2 ms (Pro) / 640 µs (Lite)														
FB		38 types	37 types	38 types	37 types	45 types	39 types	45 types	44 types									
Program Capacity		10kB		38kB														
No. of FB	FB (*1)	200		1,000														
	Timer (T)	100		200														
Processing Time	Counter (C)	100		200														
	Basic Instruction	1.3ms/100																
User Program Storage		2.5ms (Pro)/1ms (Lite)																
I/O Points		Inputs		8	16	24	30											
		Outputs		4	8	16	18											
Internal Relays		256		1,024														
Shift Registers		128		128														
Data Registers		400		2000														
Special Data Registers		200		200														
Adding/Reversible Counters		100		200														
Timer (1ms, 10 ms, 10 ms, 1s)		100		200														
Clock		Precision: ±30 seconds/month (25°C, typical)																
RAM Backup	Backup Data	Internal relays, shift registers, counters, data registers, clock data																
	Backup Duration	Approximately 30 days (typical) at 25°C after backup battery is fully charged																
	Battery	Lithium secondary battery																
	Charging Time	Approximately 15 hours required to charge from 0 to 90%																
	Replaceability	Not possible																
Self-Diagnostic Functions		Keep data check, power failure check, clock error check, watchdog timer check, timer/counter preset value change error check, user program syntax check, user program execution check, system error check, memory cartridge transfer error check																
Input Filter		No filter, 3 to 15 ms (selectable in increments of 1 ms)																
Catch Input/Interrupt Input		4/4		6/6														
High-speed Counter	Maximum Counting Frequency and Points	Single/two-phase selectable	2 (*2)	—	2 (*2)	—	2 (*2)	—	2 (*2)									
		Single-phase	2 (x 100 kHz)	—	4 (x 100 kHz)	—	4 (x 100 kHz)	—	4 (x 100 kHz)									
Counting Range		0 to 4,294,967,295 (32 bits)																
Operation Mode		Rotary encoder mode and adding counter mode																
Analog Voltage Inputs		Points	2	None	4	None	6	None	8									
		Input Range	0 to 10V DC															
		Input Impedance	78 kΩ															
		Digital Resolution	0 to 1,000 (10 bits)															
Pulse Outputs	100 kHz	No. of outputs	—	—	—	—	2	—	2									
		Function	—	—	—	—	(*3)	—	(*3)									
	5 kHz	No. of outputs	—	—	—	—	2	—	2									
		Function	—	—	—	—	(*4)	—	(*4)									
External Output Power Supply for Sensor	Output Voltage	—	—	—	24V DC (+10%, -15%)	—	24V DC (+10%, -15%)	—	24V DC (+10%, -15%)									
	Output Current	—	—	—	250 mA	—	300 mA	—	300 mA									
	Overload Detection	—	—	—	Impossible	—	Impossible	—	Impossible									
	Insulation	—	—	—	Internal Circuit	—	Internal Circuit	—	Internal Circuit									
USB-mini B (*5)		○		○		○		○										
USB-A (*5)		—		—		—		—										
RS232C (*5)		—		○ (*6)		○ (*6)		○ (*6)										
RS485 (*5)		—		○ (*6)		○ (*6)		○ (*6)										
Ethernet		—		○		○		○										
Expansion Communication Ports	Port 2	—		○		○		○										
	Port 3	—		—		○		○										
Memory Cartridge		○		○		○		○										
SD Memory Card		—		—		○ (*7)		○ (*7)										

*1) Except for timer, counter, input FB, and output FB.

*2) 100 kHz when single-phase, 50 kHz when two-phase, multiple 2.4

*3) Pulse [PULS], Pulse without modulation [PWM], Ramp [RAMP, ARAMP], Zero return [ZRN]

*4) Pulse [PULS], Pulse without modulation [PWM]

*5) Not isolated from internal circuits.

*6) When communication cartridge is installed.

*7) The maximum capacity is 32 GB. DLOG/FB and TRACE/FB instructions are used to write data. For details, see L-071 to L-073.

Display Specifications

Touch/Pro (Display Model/Built-in LCD)

Part No.	Touch		Pro
Display Element	TFT color LCD	STN monochrome LCD	STN monochrome LCD
Colors/Shades	65,536 colors	Monochrome 8 shades	Monochrome
Effective Display Area	88.92 W x 37.05 H mm	87.59 W x 35.49 H mm	47.98 W x 18.22 H mm
Display Resolution	240 W x 100 H pixels		192 W x 64 H pixels
View Angle	Left/right 40°, top 20°, bottom 60°	Left/right/top/bottom: 45°	Left/right 30°, top 20°, bottom 40°
Contrast Adjustment	Not possible	32 levels	Not possible
Backlight	LED	LED (white, red, pink)	LED (green)
Backlight Life	50,000 hours (Note 1)		—
Brightness	400 cd/m² (Note 2)	740 cd/m² (Note 2)	45 cd/m²
Brightness Adjustment	32 levels		Not possible
Backlight Control	Auto off function		On/off
Backlight Replacement	Not possible		
Display Character Size	1/4 Size	8 x 8 pixels [JIS 8-bit code, ISO 8859-1 (Western European languages), ANSI 1250 (central Europe)], ANSI 1257 (Baltic), ANSI 1251 (Cyrillic)	—
	1/2 Size	8 x 16 pixels [JIS 8-bit code, ISO 8859-1 (Western European languages), ANSI 1250 (central Europe)], ANSI 1257 (Baltic), ANSI 1251 (Cyrillic)	8 x 16 pixels [JIS 8-bit code, ISO 8859-1 (Western European languages), ANSI 1251 (Cyrillic)]
	Full Size	16 x 32 pixels, 24 x 48 pixels, 32 x 64 pixels (Western European languages: ISO 8859-1)	—
	Double Size	32 x 32 pixels (Japanese JIS first level characters, Mincho font)	—
No. of Characters	1/4 Size	30 characters x 12 lines/screen	—
	1/2 Size	30 characters x 6 lines/screen	24 characters x 4 lines
	Full Size	15 characters x 6 lines/screen	12 characters x 4 lines
	Double Size	7 characters x 3 lines/screen	—
Character Magnification	0.5x, 1x, 2x, 3x, 4x, 5x, 6x, 7x, 8x vertically and horizontally	—	—
Character Attributes	Blink, reverse, bold, shadowed (blink is 1 sec or 0.5 sec)	Blink, reverse	—
Graphics	Line, polyline, polygon, rectangle, circle, ellipse, arc, pie, equilateral polygons (3, 4, 5, 6, 8), fill, picture	—	—
Window Display	3 popup screens + 1 system screen	—	—

Note 1: The backlight life refers to the time until the brightness reduces by half after use at 25°C.

Note 2: Brightness of LCD only (monochrome LCD: when lit white).

Operation Specifications

Touch/Pro (Display/LCD Models)

Part No.	Touch	Pro
Switching Element	Analog resistive membrane (touch panel)	Rubber switches
Operating Force	0.2 to 2.5N	2.0 N minimum
Mechanical Life	1 million operations	10,000 operations
Acknowledgment Sound	Electric Buzzer	Not provided
Multiple Press	Not possible	Possible

HMI Function Specifications (Touch)

Functions	Drawings, bit button, word button, goto screen button, key button, multi-button, keypad, selector switch, potentiometer, numerical input, character input, pilot lamp, picture display, message display, message switching display, alarm list display, alarm log display, numerical display, bar chart, line chart, pie chart, meter, calendar, bit write command, word write command, goto screen command, timer, script command, multi-command, system area, start time, Auto Backlight OFF, I/O Link, user communication, maintenance communication, DM Link Communication, PLC Link Communication (Note 1), alarm log, data log, operation log, data storage area, preventive maintenance, recipe, text group, global script, user account, project data transfer using external memory, downloading logged data in external memory, USB auto-run function
-----------	---

Note 1: The up-to-date information on the connectable PLC can be obtained from <http://www.idec.com/language>.

Input Specifications (Touch/Pro/Lite)

Part No.			Touch FT1A-			Pro/Lite FT1A-																			
			12RA-	*14KA-*	*14SA-*	H12RA B12RA	H12RC B12RA	H24RA B24RA	H24RC B24RC	H40RKA B40RKA	H40RSA B40RSA	H40RC B40RC	H48KA B48KA	H48SA B48SA	H48KC B48KC	H48SC B48SC									
Digital Input	Input Points		6			6	8	12	16	18	24			22			30								
	Input Type		Sink	Source	Sink	Sink	No-voltage (with contact)	Sink	Sink/ Source	Source	Sink	Sink/ Source	Source	Sink	Sink	Sink/Source									
	Input Voltage Range		0 to 28.8V DC																						
	Rated Input Current		4.4 mA	5.2 mA	4.4 mA	No-voltage type and sink/source type: 5.3 mA, sink type: 4.4 mA, source type: 5.2 mA																			
	Input Impedance		5.5 kΩ	4.7 kΩ	5.5 kΩ	No-voltage type and sink/source type: 4.3 kΩ, sink type: 5.5 kΩ, source type: 4.7 kΩ																			
	Input Delay Time	OFF → ON	2.5 µs + soft filter setting			40 µs + filter value (high-speed input section: 2.5 µs + soft filter value)																			
		ON → OFF	5 µs + soft filter setting			150 µs + filter value (high-speed input section: 5 µs + soft filter value)																			
	Isolation	Between input terminals	Not isolated			Not isolated																			
		Internal circuit	Not isolated			No-voltage type and sink/source type: optocoupler isolated, sink type and source type: not isolated																			
	Input Type		Type 1 (IEC 61131-2)																						
Input Specification	External Load for I/O Interconnection		Not needed																						
	Operating Level	OFF voltage	Sink type: 5V DC max. Source type: 15V DC min.			No-voltage type: 18 kΩ min., sink/source type and sink type: 5 VDC max., source type: 15 VDC min.																			
		ON voltage	Sink type: 15V DC min. Source type: 5V DC max.			No-voltage type: 2 kΩ max., sink/source type and sink type: 15 VDC min., source type: 5 VDC max.																			
		OFF current	Sink type: 0.9 mA max. Source type: -1.0 mA min.			No-voltage type and sink/source type: 1.1 mA max., sink type: 0.9 mA max., source type: -1.0 mA min.																			
		ON current	Sink type: 2.7 mA min. Source type: -3.0 mA max.			No-voltage type and sink/source type: 3.0 mA min., sink type: 2.7 mA min., source type: -3.0 mA max.																			
	Input Points		2	2	4 Voltage input 0 to 10.0V DC 2 ms maximum — 2 ms + filtering time + scan time 0 to 1,000 (10 bits) ±1.5% of full scale ±5% of full scale Not isolated Not isolated	4	6 Voltage input 0 to 10.0V DC 2 ms maximum — 2 ms + filtering time + scan time 0 to 1,000 (10 bits) ±1.5% of full scale ±5% of full scale Not isolated Not isolated	6	8 Voltage input 0 to 10.0V DC 2 ms maximum — 2 ms + filtering time + scan time 0 to 1,000 (10 bits) ±1.5% of full scale ±5% of full scale Not isolated Not isolated	8	— 0 to 10.0V DC 2 ms maximum — 2 ms + filtering time + scan time 0 to 1,000 (10 bits) ±1.5% of full scale ±5% of full scale Not isolated Not isolated														
	Input Type		Voltage input	Voltage/Current input		4		6		8															
	Input Range		0 to 10.0 VDC / 4 to 20 mA	0 to 10.0V DC		4		6		8															
	Sampling Duration Time		2 ms maximum	2 ms maximum		4		6		8															
	Total Input System Transfer Time		3 ms + sampling time + scan time (voltage input) 12 ms + sampling time + scan time (current input)	2 ms + filtering time + scan time		4		6		8															
	Digital Resolution		0 to 1,000 (10 bits)	0 to 1,000 (10 bits)		4		6		8															
	Input Error	25°C	±3% of full scale	±1.5% of full scale		4		6		8															
		Total	±5% of full scale	±5% of full scale		4		6		8															
	Isolation	Between input terminals	Not isolated	Not isolated		4		6		8															
		Internal circuit	Not isolated	Not isolated		4		6		8															
Analog Input	When used as digital input		Digital I/O	Type 1 (not conforming to IEC 61131-2 digital I/O type)																					
			OFF voltage: 5V maximum																						
			ON voltage: 15V minimum																						
			OFF current: 0.06 mA maximum																						
			ON current: 0.20 mA minimum																						
External Power for Input	Input Voltage Range		—	—	—	20.4 to 26.4V DC	—	20.4 to 26.4V DC	—	20.4 to 26.4V DC	—	20.4 to 26.4V DC	—	20.4 to 26.4V DC	—										
	Output Current Capacity		—	—	—	250 mA	—	300 mA	—	300 mA	—	300 mA	—	300 mA	—										

Output Specifications (Touch/Pro/Lite)

Part No.		Touch FT1A-			Pro/Lite FT1A-										
		12RA-	*14KA-*	*14SA-*	H12RA B12RA	H12RC B12RC	H24RA B24RA	H24RC B24RC	H40RKA B40RKA	H40RSA B40RSA	H40RC B40RC	H48KC B48KC	H48SC B48SC	H48KA B48KA	H48SA B48SA
Transistor Output	Output Points	Transistor Sink Output	—	4	—	—	—	—	4	—	—	18	—	18	—
	Output Points	Transistor Source Output	—	—	—	—	—	—	—	4	—	—	18	—	18
	Rated Load Voltage	24V DC	—	—	—	—	—	—	—	24V DC	—	—	24V DC	—	24V DC
	Input Voltage Range	20.4 to 28.8V DC	—	—	—	—	—	—	—	20.4 to 28.8V DC	—	—	20.4 to 28.8V DC	—	20.4 to 28.8V DC
	Maximum Load Current	1 point	1 common	0.3A maximum	—	—	—	—	0.3A maximum	—	—	—	—	—	0.3A maximum
	Voltage Drop (ON Voltage)	1A	—	1A maximum	—	—	—	—	1A maximum	—	—	—	—	—	1A maximum
	Inrush Current	0.1 mA maximum	—	1V maximum (voltage between COM and output terminals when output is ON)	—	—	—	—	1V maximum (voltage between COM and output terminals when output is ON)	—	—	—	—	—	1V maximum (voltage between COM and output terminals when output is ON)
	Leakage Current	39V ± 1V	—	1A	—	—	—	—	1A	—	—	—	—	—	1A
	Clamping Voltage	8 W maximum	—	0.1 mA maximum	—	—	—	—	0.1 mA maximum	—	—	—	—	—	0.1 mA maximum
	Maximum Lamp Load	L/R = 10 ms (28.8V DC, 1 Hz)	—	39V ± 1V	—	—	—	—	39V ± 1V	—	—	—	—	—	39V ± 1V
	Inductive Load	100 mA maximum, 24V DC	—	8 W maximum	—	—	—	—	8 W maximum	—	—	—	—	—	8 W maximum
	External Current Draw	Optocoupler isolated	—	L/R = 10 ms (28.8V DC, 1 Hz)	—	—	—	—	L/R = 10 ms (28.8V DC, 1 Hz)	—	—	—	—	—	L/R = 10 ms (28.8V DC, 1 Hz)
	Isolation	Between output terminal and internal circuit	Not isolated	100 mA maximum, 24V DC (V terminal supply power)	—	—	—	—	100 mA maximum, 24V DC (V terminal supply power)	—	—	—	—	—	100 mA maximum, 24V DC (V terminal supply power)
	Output Delay	Between output terminals	100μS max.	Optocoupler isolated	—	—	—	—	Optocoupler isolated	—	—	—	—	—	Optocoupler isolated
	OFF → ON	200μS max.	Same common line: Not isolated	Same common line: Not isolated	—	—	—	—	Separate common line: isolated	—	—	—	—	—	Separate common line: isolated
	ON → OFF	(*)1)	(*)1)	(*)1)	—	—	—	—	(*)1)	—	—	—	—	—	(*)1)
10A relay	Output Points	4	—	—	4	—	—	—	—	—	—	—	—	—	—
	Output Type	1NO contact	—	—	1NO contact	—	—	—	—	—	—	—	—	—	—
	Rated Load Current	240V AC 10A, 30V DC 10A	—	—	240V AC 10A, 30V DC 10A	—	—	—	—	—	—	—	—	—	—
	Minimum Switching Load	10 mA/5V DC (reference value)	—	—	10 mA/5V DC (reference value)	—	—	—	—	—	—	—	—	—	—
	Initial Contact Resistance	100 mΩ maximum (1A, at 6V DC)	—	—	100 mΩ maximum (1A, at 6V DC)	—	—	—	—	—	—	—	—	—	—
	Output Points	—	—	—	—	—	—	—	4	4	8	8	12	—	—
2A relay	Output Points per Common Line	COM4 COM5 COM6	—	—	—	—	—	—	—	—	—	—	—	—	—
	Output Type	—	—	—	—	—	—	—	—	—	—	—	—	—	—
	Maximum Load Current	1 point	—	—	—	—	—	—	—	—	—	—	—	—	—
	Load Current	1 common	—	—	—	—	—	—	—	—	—	—	—	—	—
	Minimum Switching Load	—	—	—	—	—	—	—	—	—	—	—	—	—	—
	Initial Contact Resistance	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Relay Output Common	Electrical Life	100,000 operations minimum (resistive load 1,800 operations/h)	—	—	—	—	—	—	4	4	4	4	4	—	—
	Mechanical Life	20 million operations minimum (no load 18,000 operations/h)	—	—	—	—	—	—	—	—	4	4	4	—	—
	Dielectric Strength	Between output terminal and internal circuit	2,300V AC, 1 minute	—	—	—	—	—	—	—	—	—	4	—	—
	Between output terminals (between COMs)	—	2,300V AC, 1 minute	—	—	—	—	—	—	—	—	—	—	—	1a contact
	Output Points	—	2	—	—	—	—	—	—	—	—	—	—	—	—
	Analog Output Signal Type	—	Voltage/Current output (Selectable)	—	—	—	—	—	—	—	—	—	—	—	—
Analog Output	Analog Output Range	0 to 10V DC / 4 to 20mA	—	—	—	—	—	—	—	—	—	—	—	—	—
	Load Impedance	2kΩ min (voltage input) / 500 Ω max (current input)	—	—	—	—	—	—	—	—	—	—	—	—	—
	Applicable Load Type	Resistive Load	100,000 operations minimum (resistive load 1,800 operations/h)	—	—	—	—	—	—	—	—	—	—	—	—
	Maximum Deviation at 25°C	±0.3% of full scale	20 million operations minimum (no load 18,000 operations/h)	—	—	—	—	—	—	—	—	—	—	—	—
	Temperature Coefficient	±0.02%/ ^o C of full scale	2,300V AC, 1 minute	—	—	—	—	—	—	—	—	—	—	—	—
	Repeatability After Stabilization Time	±0.4% of full scale	2,300V AC, 1 minute	—	—	—	—	—	—	—	—	—	—	—	—
Analog Output	Non-linearity	±0.01% of full scale	—	—	—	—	—	—	—	—	—	—	—	—	—
	Output Ripple	30mV max. (spike noise not included)	—	—	—	—	—	—	—	—	—	—	—	—	—
	Overshoot	0% (*2)	—	—	—	—	—	—	—	—	—	—	—	—	—
	Total Error	±1.0% of full scale including ripple	—	—	—	—	—	—	—	—	—	—	—	—	—
	Effect of Improper Output Connection	No damage	—	—	—	—	—	—	—	—	—	—	—	—	—
	Digital Resolution	0 to 1,000 (10 bits)	—	—	—	—	—	—	—	—	—	—	—	—	—
Monotonicity	Output Value of LSB	10mV (0-10V) / 16µA (4-20mA)	—	—	—	—	—	—	—	—	—	—	—	—	—
	Yes	Yes	—	—	—	—	—	—	—	—	—	—	—	—	—
	Current loop open	Not detectable	—	—	—	—	—	—	—	—	—	—	—	—	—

(*1) High-speed output terminal (100 kHz pulse output terminal): 5 µs max. Normal output terminal (including 5kHz pulse output terminal): 100 µs max.

(*2) Overshoot may occur under light load conditions. Overshoot can be suppressed by inserting a damping resistor. Damping resistor value: approx. 150Ω including the input impedance.

Cartridges

Digital I/O Cartridge Specifications

Input Cartridge

Part No.		FC6A-PN4
Input Points		4 (4/1 common)
Rated Input Voltage		12/24V DC sink/source input signal
Input Voltage Range		0 to 28.8V DC
Rated Input Current		2.5 mA/point (12V DC) 5mA/point (24V DC)
Input Impedance		4.4 kΩ
OFF Voltage		5V maximum
ON Voltage		8.5V minimum
OFF Current		0.9 mA maximum
ON Current		1.7 mA minimum (at 8.5V DC)
Input Delay Time (24V DC)	Turn ON	0.5ms
	Turn OFF	0.5ms
Isolation		Between input terminals: Not isolated Internal circuit: Optocoupler-isolated
External Load for I/O Interconnection		Not needed
Signal Determination Method		Static
Effect of Improper Input Connection		Both sink and source input signals can be connected. If any input exceeding the rated value is applied, permanent damage may be caused.
Internal Current Draw	All Inputs ON	35mA (3.3V DC) 0mA (24V DC)
	All Inputs OFF	30mA (3.3V DC) 0mA (24V DC)
Internal Power Consumption (at 24V DC while all inputs ON)		0.10W
Cable Length		3m in compliance with electromagnetic immunity
Applicable Ferrule		1-wire: AI 0.5-8 WH (Phoenix Contact)
Weight (approx.)		15g

Output Cartridge

Part No.		FC6A-PTK4	FC6A-PTS4
Output Points		4 sink (4/1 common)	4 source (4/1 common)
Rated Input Voltage		12/24V DC	
Input Voltage Range		10.2 to 28.8V DC	
Maximum Load Current	Per Point	0.1A	
	Per Common	0.4A	
Output Delay	Turn ON	450µs maximum	
	Turn OFF	450µs maximum	
Isolation		Between input terminals: Not isolated Internal circuit: Optocoupler-isolated	
Voltage Drop (ON Voltage)		1V max (voltage between COM and output terminal when output is on.)	
Inrush Current		1A	
Leakage Current		0.1mA maximum	
Clamping Voltage		Approx. 50V	
Maximum Lamp Load		2.4W	
Inductive Load		L/R=10ms (28.8V DC, 1Hz)	
External Current Draw		100mA maximum, 24V DC (power voltage at the +V terminal terminal at source)	100mA maximum, 24V DC (power voltage at the -V terminal at source)
Overcurrent Protection		No	
Internal Current Draw	All Outputs ON	35mA (3.3V DC) 0mA (24V DC)	
	All Outputs OFF	30mA (3.3V DC) 0mA (24V DC)	
Internal Power Consumption (at 24V DC while all outputs ON)		0.10W	
Applicable Ferrule		1-wire: AI 0.5-8 WH (Phoenix Contact)	
Weight (approx.)		15g	

Cartridges

Analog Cartridges

Specifications

Part No.	FC6A-PJ2A	FC6A-PJ2CP	FC6A-PK2AV	FC6A-PK2AW
Type	Voltage/Current Input	Temperature Input	Voltage Output	Current Output
Number of Input/Output	2	2	2	2
Rated Voltage	5.0V, 3.3V (supplied from the Touch)			
Consumption Current	5.0V: – 3.3V: 30mA		5.0V: 70mA 3.3V: 30mA	5.0V: 185mA 3.3V: 30mA
Weight	15g			

Input Specifications

Part No.	FC6A-PJ2A		FC6A-PJ2CP	
Input Type	Voltage Input	Current Input	Resistance Thermometer	Thermocouple
Input Range	0 to 10V DC	4 to 20mA DC 0 to 20mA DC	Pt100: –200 to +850°C Pt1000: –200 to +600°C Ni100: –60 to +180°C Ni1000: –60 to +180°C 3-wire RTD	K: –200 to 1300°C J: –200 to 1000°C R: 0 to 1760°C S: 0 to 1760°C B: 0 to 1820°C E: –200 to 8200°C T: –200 to 400°C N: –200 to 1300°C C: 0 to 2315°C
Input Impedance	1MΩ min.	250Ω max.	1MΩ min.	
Allowable Conductor Resistance	—	10Ω max.	—	
Input Detection Current	—	Typ: 0.2mA, 1.0mA max.	—	
AD Conversion	Sample Duration Time	10ms	250ms	
	Sample Interval	20ms	500ms	
	Total Input System Transfer Time	20ms + 1 scan	500ms + 1 scan	
	Type of Input	Single-ended input		
	Operating Mode	Self-scan		
	Conversion Method	SAR		
Input Error	Maximum Error at 25°C	±0.1% of full scale	±0.1% of full scale	±0.1% of full scale Cold junction compensation accuracy ±4.0°C or less Exceptions: R, S thermocouple error: ±6.0°C (0 to 200 °C range only) B thermocouple error: Not guaranteed (0 to 300 °C range only) K, J, E, T, N thermocouple error: ±0.4% of full scale (0°C or lower range only)
	Temperature Coefficient	±0.02%/°C of full scale		
	Reproducibility After Stabilization Time	±0.5% of full scale		
	Non-linearity	±0.01% of full scale		
	Maximum Error	±1.0% of full scale		
	Digital Resolution	4096 (12 bits)	Pt100: 10,500 (14 bits) Pt1000: 8,000 (13 bits) Ni100: 2,400 (12 bits) Ni1000: 2,400 (12 bits)	K: 15,000 (14 bits) J: 12,000 (14 bits) R: 17,600 (15 bits) S: 17,600 (15 bits) B: 18,200 (15 bits) E: 10,000 (14 bits) T: 6,000 (13 bits) N: 15,000 (14 bits) C: 23,150 (15 bits)
Data	LSB Input Value	2.44mV (0 to 10V DC) 3.91µA (DC4 to 20mA)	4.88µA (DC0 to 20mA) 3.91µA (DC4 to 20mA)	0.1°C 0.18°F
	Data Format in Application	Can be arbitrarily set for each channel in the range of –32,768 to 32,773		
	Monotonicity	Yes		
	Maximum Temporary Deviation during Electrical Noise Tests	±4.0% of full scale		
Noise Resistance	Recommended Cable	Shielded twisted pair		Twisted pair
	Crosstalk	1LSB max.		
	Isolation	None		
Effect When Input is Incorrectly Wired	No damage			
	Maximum Allowable Constant Load (non-destructive)	13V DC	40mA	13V DC
Input Type Modification		Software programming		
Calibration to Maintain Rated Accuracy		Impossible		

Output Specifications

Part No.	FC6A-PK2AV	FC6A-PK2AW
Type	Voltage Output	Current Output
Output Type	0 to 10V DC	—
Load Impedance	—	4 to 20mA DC
Load Type	2kΩ min.	500 kΩ max.
D/A Conversion	Resistance Load	
Cycle Time	20ms	
Settling Time	40ms max.	20ms max.
Total Output System Transfer Type	60ms+1 scan	40ms+1 scan
Maximum Error at 25°C	±0.3% of full scale	
Temperature Coefficient	±0.02%/°C of full scale	
Reproducibility after Stabilization Time	±0.4% of full scale	
Non-linearity	±0.01% of full scale	
Output Ripple	30mV max.	
Overshoot	0%	
Maximum Error	±1.0% of full scale	
Effect of Improper Output Terminal Connection	No damage	
Data	Digital Resolution	4096 (12 bits)
	LSB Output Value	2.44mV (0 to 10V) 3.91µA (4 to 20mA)
	Data Format in Application	0 to 4095 (0 to 10V) (4 to 20mA)
	Monotonicity	Yes
	Open Current Loop	— Cannot be detected
Noise Resistance	Maximum Temporary Deviation during Electrical Noise Tests	±4.0% of full scale
	Recommended Cable	Shielded twisted pair
	Crosstalk	1 LSB max.
Isolation	Calibration to Maintain Rated Accuracy	None Impossible
	Selection of Output Signal Type	Voltage output only Current output only

Applicable Wire

Cartridge Part No.	FC6A-PJ2A	FC6A-PJ2CP	FC6A-PK2AV	FC6A-PK2AW
Applicable Wire	0.3mm² (AWG22) shielded twisted pair	0.3mm² (AWG22) twisted pair	0.3mm² (AWG22) shielded twisted pair	

Expansion Communication Cartridges


Specifications

Part No.	FT1A-PC1	FT1A-PC2	FT1A-PC3
Termination Connector	Mini DIN	Mini DIN	Screw Terminal block
Standards	EIA RS232C	EIA RS485	EIA RS485
Maximum Baud Rate	115,200 bps	115,200 bps	115,200 bps
Communication Functions	Maintenance communication, User communication, Modbus RTU master/slave	Maintenance communication, User communication, odbus RTU master/slave	Maintenance communication, User communication, Modbus RTU master/slave
Isolation between Internal Circuit and Communication Port	Not isolated	Not isolated	Not isolated
Recommended Communication Cable	Special cable	Special cable	Twisted-pair shielded cable with a minimum core wire of 0.3 mm ² (Conductor resistance 85 Ω/km maximum, shield resistance 20 Ω/km maximum)
Maximum Cable Length	—	—	200m

Mounting Hole Layout


Touch

FT1A-*12RA-*
FT1A-*14*A-*




Pro/Lite


FT1A-*12**

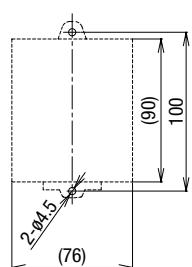

FT1A-*24**

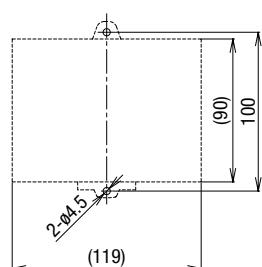

FT1A-*40**/FT1A-*48**

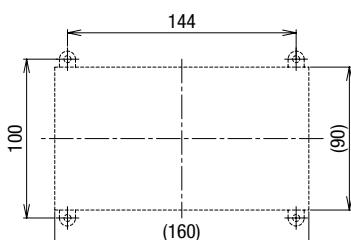


All dimensions in mm.

Dimensions


Touch (Display Model) / Relay Output Model (FT1A-12RA-*)

When using mounting bracket (HG9Z-4K2PN04)

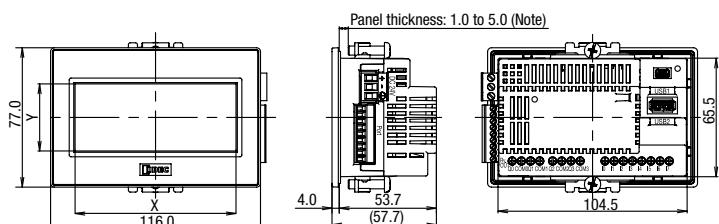

Note: Waterproof characteristic may not be obtained depending on the panel material and size.


When using rear mount adapter (FT9Z-1A01)

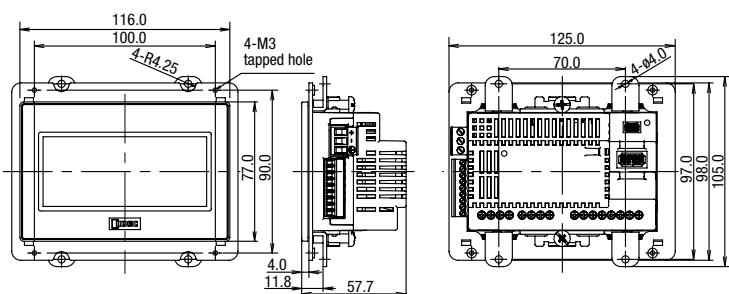

Dimensions


Touch (Display Model)/Transistor Output Model (FT1A-14KA-*/FT1A-14SA-*)

When using mounting bracket (HG9Z-4K2PN04)

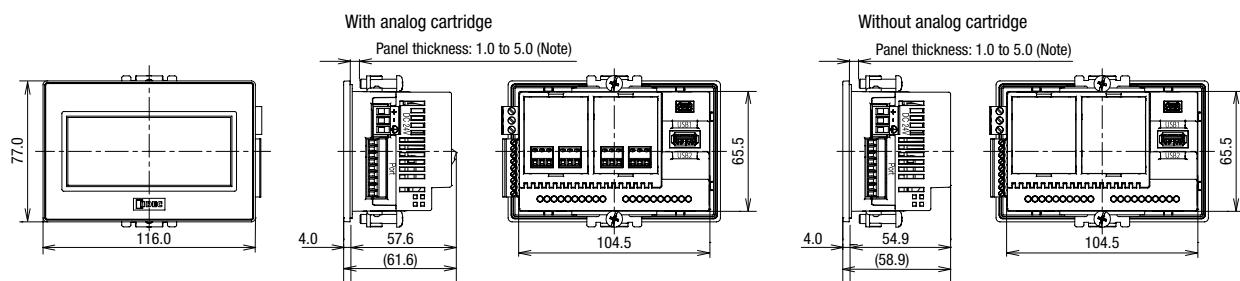

Note: Waterproof characteristic may not be obtained depending on the panel material and size.


When using rear mount adapter (FT9Z-1A01)

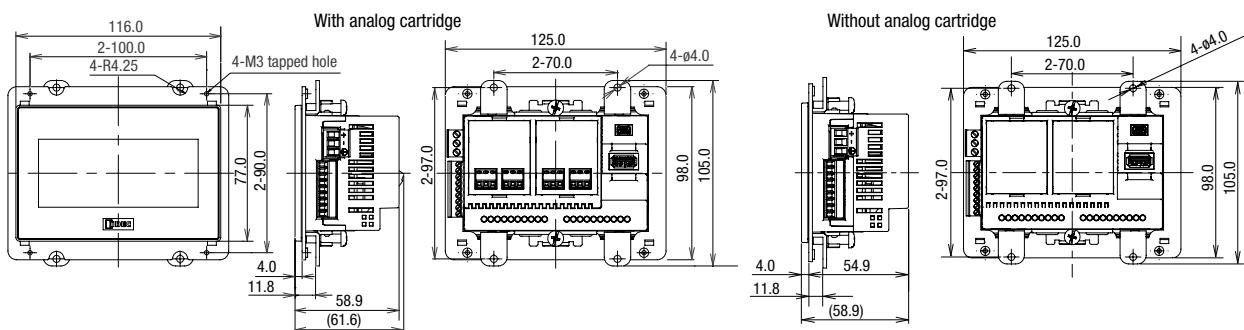


Pro (LCD Model)

Lite (No LCD Model)


FT1A-H12*A/*C




FT1A-H24*A/*C




FT1A-B12*A/*C




FT1A-B24*A/*C



FT1A-H40*A/*C

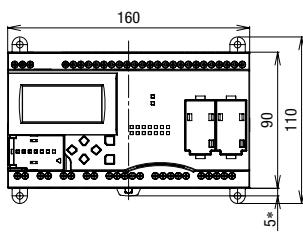


FT1A-H***A

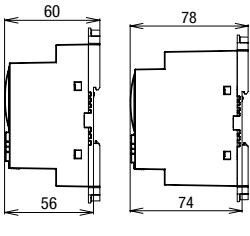


FT1A-H***C


FT1A-B***A

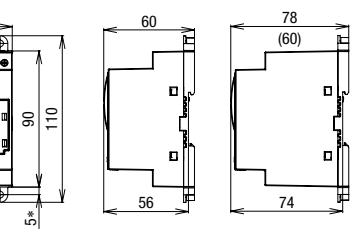

FT1A-B***C




FT1A-H48*A/*C

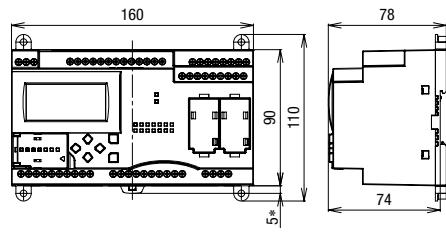

Note: 9.3 mm when the clamp is pulled out.

FT1A-B48*A/*C

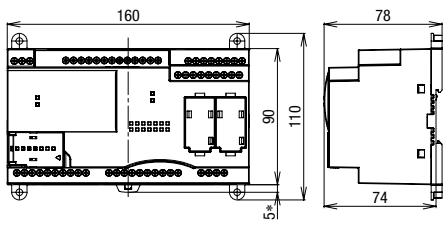


Note: 9.3 mm when the clamp is pulled out.

All dimensions in mm.


Terminal Arrangement and I/O Wiring Diagram Examples

Touch (Display Model)

FT1A-*12RA-*

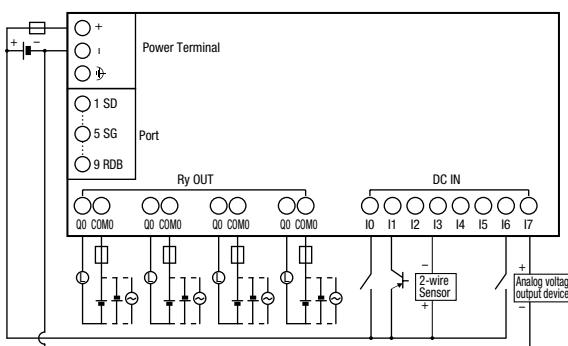


FT1A-*14KA-*

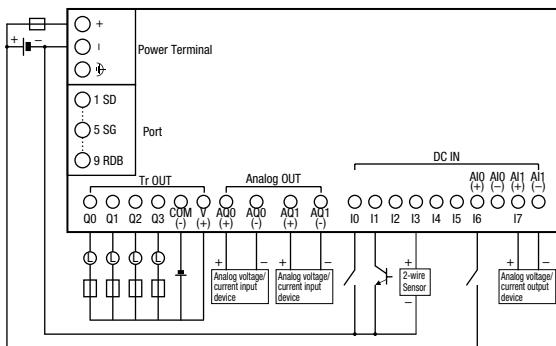

For terminal arrangement and I/O wiring diagram, see Instruction Sheet.


: Fuse : Load

FT1A-*14SA-*

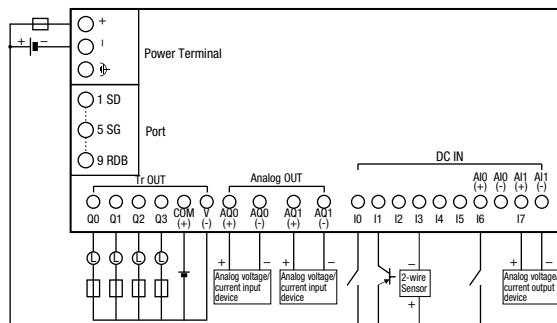


Pro/Lite (LCD/No LCD Models)


FT1A-*12RA

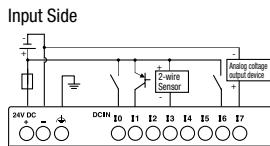


Output Side

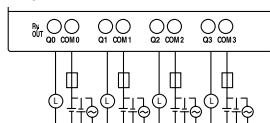

FT1A-*12RC

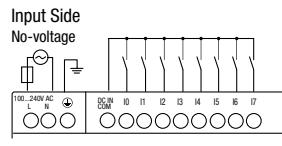


Output Side

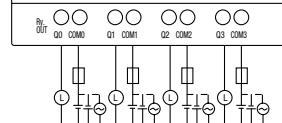


External power for input cannot be used.


FT1A-*24RA

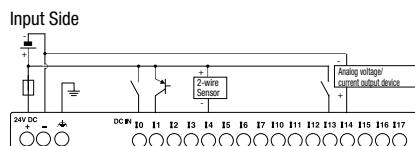


Output Side

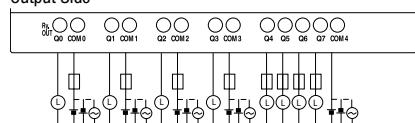


FT1A-*24RC

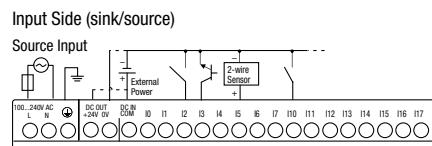

Sink Input

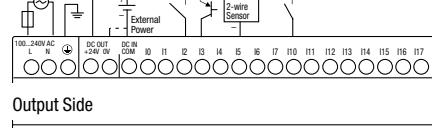

Output Side

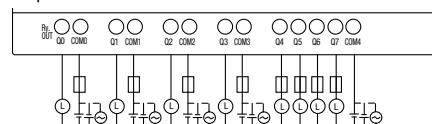


Terminal Arrangement and I/O Wiring Diagram Examples

Pro/Lite (LCD/No LCD Models)


FT1A-*40RC

Input Side


Source Input



Sink Input




Output Side

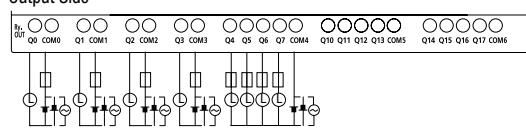

FT1A-*40RSA


Input Side

Sink Input

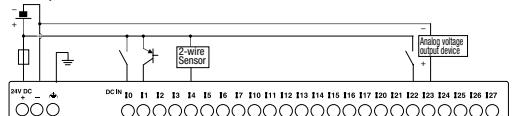

Output Side


Source Output (transistor output)

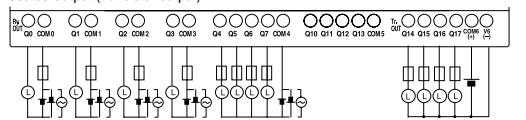


FT1A-*48KA

Input Side

Source Input (Analog/Digital Shared Input) is Sink Input

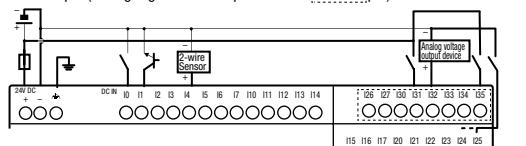

Sink Output

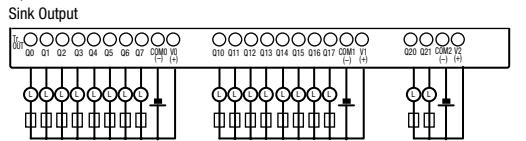

Recommended Ferrules for Touch/Pro/Lite Terminals


Touch (LCD Model), Pro/Lite (LCD/No Models)

For terminal arrangement and I/O wiring diagram, see Instruction Sheet.

FT1A-*40RKA


Input Side

Source Input (Analog/Digital Shared Input) is Sink Input

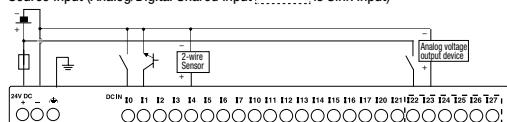

Output Side


Sink Output (transistor output)

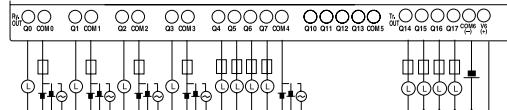

FT1A-*48SA


Input Side

Sink Input

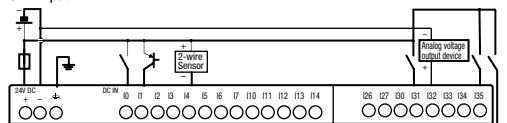


Output Side


Source Output

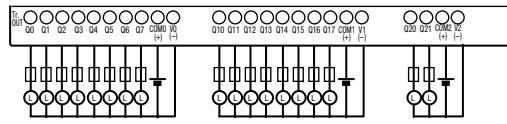

For 1-wire connection



For 2-wire connection

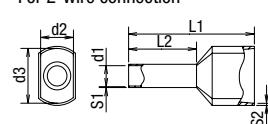

Note: Crimping pliers - Phoenix Contact part number CRIMPFOX 6 (1212034)

All dimensions in mm.

Instructions

Basic Instructions (Touch/Pro/Lite)

Instructions	Function
LOD	Stores intermediate results and reads contact status
LODN	Stores intermediate results and reads inverted contact status
AND	Series connection of NO contact
ANDN	Series connection of NC contact
OR	Parallel connection of NO contact
ORN	Parallel connection of NC contact
ANDL0D	Series connection of circuit blocks
ORL0D	Parallel connection of circuit blocks
BPS	Saves the result of bit logical operation temporarily
BRD	Reads the result of bit logical operation which was saved temporarily
BPP	Restores the result of bit logical operation which was saved temporarily
OUT	Outputs the result of bit logical operation
OUTN	Output the inverted result of bit logical operation
SET	Sets output, internal relay, or shift register bit
RST	Resets output, internal relay, or shift register bit
TMS	Subtracting 1-ms on-delay timer (0 to 65,535 sec)
TMH	Subtracting 10-ms on-delay timer (0 to 655,35 sec)
TIM	Subtracting 100-ms on-delay timer (0 to 6553,5 sec)
TML	Subtracting 1-sec on-delay timer (0 to 65535 sec)
TMS0	Subtracting 1-ms off-delay timer (0 to 65,535 sec)
TMHO	Subtracting 10-ms off-delay timer (0 to 655,35 sec)
TIMO	Subtracting 100-ms off-delay timer (0 to 6553,5 sec)
TMLO	Subtracting 1-sec off-delay timer (0 to 65535 sec)
CNT	Adding counter (0 to 65,535)
CNTD	Double-word adding counter (0 to 4,294,967,295)
CDP	Dual pulse reversible counter (0 to 65,535)
CDPD	Double-word dual pulse reversible counter (0 to 4,294,967,295)
CUD	Up/down selection reversible counter (0 to 65,535)
CUDD	Double-word up/down selection reversible counter (0 to 4,294,967,295)
CC=	Equal to comparison of counter current value
CC>	Greater than or equal to comparison of counter current value
DC=	Equal to comparison of data register value
DC>	Greater than or equal to comparison of data register value
SFR	Forward shift register
SFRN	Reverse shift register
SOTU	Rising-edge differentiation output
SOTD	Falling-edge differentiation output
JMP	Jumps a designated program area
JEND	Ends a jump instruction
MCS	Starts a master control
MCR	Ends a master control
END	Ends a program

Advanced Instructions (Touch/Pro/Lite continued)

Instructions	Name
RAD	Degree to Radian
DEG	Radian to Degree
SIN	Sine
COS	Cosine
TAN	Tangent
ASIN	Arc Sine
ACOS	Arc Cosine
ATAN	Arc Tangent
LOGE	Natural Logarithm
LOG10	Common Logarithm
EXP	Exponent
POW	Power
ANDW	AND Word
ORW	OR Word
XORW	Exclusive OR Word
SFTL	Shift Left
SFTR	Shift Right
BCDLS	BCD Left Shift
WSFT	Word Shift
ROTL	Rotate Left
ROTR	Rotate Right
HTOB	Hex to BCD
BT0H	BCD to Hex
HTOA	Hex to ASCII
ATOH	ASCII to Hex
BTOA	BCD to ASCII
ATOB	ASCII to BCD
ENCO	Encode
DECO	Decode
BCNT	Bit Count
ALT	Alternate Output
CVDT	Convert Data Type
DTDV	Data Divide
DTCB	Data Combine
SWAP	Data Swap
TXDn (Note 1)	Transmit
RXDn (Note 1)	Receive
ETXDr (Note 1)	Transmit over Ethernet
ERXDr (Note 1)	Receive over Ethernet
LABEL	Label
LJMP	Label Jump
LCAL	Label Call
LRET	Label Return
DJNZ	Decrement Jump Non-zero
MSG (Note 2)	Message
IOREF	I/O Refresh
HSCRF (Note 3)	High-speed Counter Refresh
WEEK	Week Timer
YEAR	Yearly Timer
TADD	Time Addition
TSUB	Time Subtraction
HOUR	Hour Meter
HTOS	HMS to Sec
STOH	Sec to HMS
DTML	1-sec Dual Timer
DTIM	100-ms Dual Timer
DTMH	10-ms Dual Timer
DTMS	1-ms Dual Timer
TTIM	Teaching Timer
PULSn (Note 4)	Pulse Output
PWMn (Note 4)	Pulse Width Modulation
RAMPn (Note 4)	Ramp Pulse Output
ZRNn (Note 4)	Zero Return
ARAMPn (Note 4)	Advanced Ramp
DI	Disable Interrupt
EI	Enable Interrupt
XYFS	XY Format Set
CVXTY	Convert X to Y
CVYTX	Convert Y to X
PID (Note 5)	Perform PID control
AVRG	Average
FIFOF	FIFO Format
FIEX	First-In Execute
FOEX	First-Out Execute
NDSRC	N Data Search
SCRPT	Script
DLOG (Note 6)	Data Logging
TRACE (Note 6)	Data Trace

Note 1: Pro/Lite 24-I/O, 40-I/O, 48-I/O type only

Note 2: Pro only

Note 3: Touch, Pro/Lite DC power type only

Note 4: Pro/Lite 40-I/O DC type and 48-I/O AC/DC type only

Note 5: Touch transistor output model only (FT1A-*14SA/FT1A-*14KA)

Note 6: Pro/Lite 40-I/O, 48-I/O only

Function Blocks

Type	Symbol	Name and Diagram	Function
Input	I	Digital Input 	Inputs ON/OFF information from an external to the SmartAXIS.
	SM	Special Internal Relay 	Special internal relays can be used as bit inputs for FBs in the SmartAXIS. Special function is allocated to each special internal relay.
	R	Shift Register 	Outputs ON/OFF state of a shift register device.
	AI	Analog Input 	The analog input values (0 to 10V DC) for the analog input terminals are converted to digital values (0 to 1,000) and output. With the analog input linear conversion function, the analog input value can be linearly converted within a range of -32,768 to 32,767.
Output	Q	Digital Output 	Outputs ON/OFF information from the SmartAXIS to an external device.
	M	Internal Relay 	A bit unit FB used internally by the SmartAXIS.
Logical Operation	AND	Logical AND 	Implements logical AND for a maximum of four input signals (ON/OFF) and outputs the result.
	NAND	Negative Logical AND 	Implements negative logical AND for a maximum of four input signals (ON/OFF) and outputs the result.
	OR	Logical OR 	Implements logical OR for a maximum of four input signals (ON/OFF) and outputs the result.
	NOR	Negative Logical OR 	Implements negative logical OR for a maximum of four input signals (ON/OFF) and outputs the result.
	XOR	Exclusive Logical OR 	Implements exclusive logical OR for a maximum of two input signals (ON/OFF) and outputs the result.
	NXOR	Negative Exclusive Logical OR 	Implements negative exclusive logical OR for a maximum of two input signals (ON/OFF) and outputs the result.
	NOT	Negation 	Outputs the result of negating the input signal (ON/OFF).
	SOTU	Shot up 	Turns on the output for one scan when the input signal turns from off to on.
	SOTD	Shot down 	Turns on the output for one scan when the input signal turns from on to off.
	TRUTH	Truth Table 	A truth table for the output can be configured corresponding to the 16 patterns combination of the four input signals, and TRUTH FB outputs the result according to the table.
Timer	TIMU	On-delay Count Up Timer 	After the execution input turns on, the output turns on when the on-delay time elapses. The current value is incremented from zero to the preset value.
	TIMD	On-delay Count Down Timer 	After the execution input turns on, the output turns on when the on-delay time elapses. The current value is decremented from the preset value to zero.
	TIMOU	Off-delay Count Up Timer 	When the execution input turns on, the output turns on. After the execution input turns off, the output turns off when the off-delay time elapses. The current value is incremented from zero to the preset value.
	TIMOD	Off-delay Count Down Timer 	When the execution input turns on, the output turns on. After the execution input turns off, the output turns off when the off-delay time elapses. The current value is decremented from the preset values to zero.
	TIMCU	On/off-delay Timer 	After the execution input turns on, the output turns on when the on-delay time elapses. After the execution input turns off, the output turns off when the off-delay time elapses.
	SPULS	Single Shot Pulse 	After the execution input turns on, the output turns on for the configured time period.
	DTIM	Dual Timer 	The output is turned on and off according to the configured ON and OFF time.
	RPULS	Random Pulse Output 	The output is turned on for the length of random time within the configured range of time.

FT1A Controllers

Counter	CNT	Adding Counter 	When the clock input is turned on, the current value is incremented by one. The output turns on when the current value reaches the preset value.
	CUD	Up/Down Selection Reversible Counter 	When the clock input is turned on, the current value is incremented or decremented by one according to the up/down selection input. The current value is compared with ON/OFF thresholds. The output turns on or off according to the comparison result.
	HOUR	Hour Meter 	Accumulates the ON duration of the execution input in hours, minutes, and seconds. The output turns on when the accumulated time reaches the configured time.
Shift Register	SFR	Shift Register 	When the execution input turns on, the shift registers are shifted to the specified shift direction.
Data Comparison	CMP	Data Comparison 	Two inputs values are compared and the output turns on or off according to the comparison result.
	STTG	Schmitt Trigger 	The comparison input value and the ON/OFF thresholds are compared and the output turns on or off according to the comparison result.
	RCMP	Range Comparison 	The comparison input value and the upper/lower limits are compared and the output turns on or off according to the comparison result.
Data Conversion	ALT	Alternate Output 	Sets/resets the output.
Week Programmer	WEEK	Weekly Timer 	Compares the specified day of the week, ON time, and OFF time with the current time and outputs the result.
	YEAR	Yearly Timer 	Compares the specified date with the current date and outputs the result.
Interface (Note 1)	MSG	Message 	Displays data such as text and device values on the LCD on the SmartAXIS Pro.
Pulse (Note 2)	PULS	Pulse Output 	Outputs pulses at the specified frequency.
	PWM	Pulse Width Modulation 	Outputs pulses at the specified frequency and duty cycle.
	RAMP	Ramp Pulse Output 	Outputs pulses with the frequency change function.
	ZRN	Zero Return 	Outputs pulses with the different pulse frequency corresponding to the on/off state of a deceleration signal.
	ARAMP	Advanced Ramp 	Output pulses with the frequency change function according to the settings configured in the frequency table.
Data Logging (Note 3)	DLOG	Data Log 	Saves the values of the specified devices in the specified data format as a CSV file to the SD memory card.
	TRACE	Data Trace 	Saves the values of the previous number of scans for the specified device in the specified data format as a CSV file to the SD memory card.
Script	SCRPT	Script 	Enables you to program complicated processing with the script language that supports conditional branching, logical operations, arithmetic operations, and functions.
Special	HSC	High-speed Counter (Note 4) 	Operates the high-speed counter configured in the function area settings. Turns on/off the high-speed counter gate input/reset input/clear input.
	RSFF	RS Flip-flop 	When the set input turns on, the output turns on and keeps on. When the reset input turns on, the output turns off.

Note 1: Pro only

Note 2: Pro/Lite 40-I/O DC type and 48-I/O AC/DC type only

Note 3: Pro/Lite 40-I/O, 48-I/O only

Note 4: Touch, Pro/Lite DC power type only

Scripts

Type	Format	Description		
Control statements	if if else if else if else switch (Cond.expr.) switch case default while break return	if ((Cond.expr.)) { (Exe.line1); } if ((Cond.expr.)) { (Exe.line1); } else{ (Exe.line2); } if ((Cond.expr.)) { (Exe.line1); } else if ((Cond.expr2.));{ (Exe.line2); } else{ (Exe.line3); } switch ((Cond.expr.)) {case constant 1: (Cond.expr1.);break; case constant2: (Cond.expr2.); break; default: (Cond.expr3.);break;} while ((Cond.expr.)){(Exe.line);} break; return;	Execution line is executed if the conditional expression is satisfied. Execution line is executed if the value of conditional expression matches the constant. Execution line is repeatedly executed while the conditional expression is satisfied. Once the conditional expression is satisfied, it will go out of the loop by break. Script is ended.	
	Relational operator	==, !=, <, >, <=, >=	Two values are compared.	
	Logical operator	&&, , !	Logical operation of two values (AND, OR, NOT).	
	Arithmetic operator	+,-,* /, %, =	Addition, subtraction, multiplication, division, remainder, assignment	
	Bit operator	&, , ^, ~, <<, >>	Logical product (AND), logical sum (OR), exclusive logical sum (XOR), reverse, shift left, shift right	
	Bit function	Bit set	SET ([a]);	Turns bit device ([a]) to 1
		Bit reset	RST ([a]);	Turns bit device ([a]) to 0.
		Bit reverse	REV ([a]);	Reverses the 1 and 0 of bit device ([a]).
Word function	Arithmetic operation	Maximum value	MAX ([a], [b], [c])	Returns the maximum value out of ([a], [b], [c]).
		Minimum value	MIN ([a], [b], [c])	Returns the minimum value out of ([a], [b], [c]).
		Exponential function	EXP ([a])	Returns exponential function of ([a]).
		Natural logarithm	LOGE ([a])	Returns natural logarithm (base is e) for ([a]).
		Common logarithm	LOG10 ([a])	Returns common logarithm (base is 10) of ([a]).
		Exponentiation	POW ([a], [b])	Returns ([a]) to the power of ([b]).
		Square root	ROOT ([a])	Returns the square root of ([a]).
		Sine	SIN ([a])	Returns the sine of sine of ([a]) (-1 to +1).
		Cosine	COS ([a])	Returns the cosine of ([a]) (-1 - +1).
		Tangent	TAN ([a])	Returns the tangent of ([a]) (-1 to +1).
		Arcsine	ASIN ([a])	Returns the arcsine of ([a]) (-1 to +1) in radian value (-π/2 to +π/2).
		Arccosine	ACOS ([a])	Returns the arccosine of ([a]) (-1 to +1) in radian value (0 - π).
	Data type conversion	Arctangent	ATAN ([a]);	Returns the arctangent of ([a]) (-1 to +1) in radian value (-π/2 - +π/2).
		Conversion from angle to radian	RAD ([a]);	Converts the value of ([a]) from degree (°) to radian and returns the value.
		Conversion from radian to angle	DEG ([a]);	Converts the value of ([a]) from radian to degree (°), and returns the value.
		Conversion from BCD to Binary	BCD2BIN ([a])	Returns the BCD value of ([a]) in binary value.
		Conversion from binary to BCD	BIN2BCD ([a])	Returns the binary value of ([a]) in BCD value.
		Conversion from float32 to binary	FLOAT2BIN ([a])	Returns the float32 value of ([a]) in binary value.
	Data comparison and copy	Conversion from binary to float32	BIN2FLOAT ([a])	Binary value of is returned in float32 value. Returns the binary value of ([a]) in float32 value.
		Conversion from decimal to string character	DEC2ASCII ([a], [b])	Converts the decimal number of ([b]) to a character string, and stores in order with ([a]) as a starting device.
		Conversion from string character to decimal	ASCII2DEC ([a])	Returns the character string ([a]) as decimal number value.
		Data comparison	MEMCMP ([a], [b], [c])	Compares the values of of device ([a]) for ([c]) and values of device ([b]) for ([c]).
	Character string operation	Data copy	MEMCPY ([a], [b], [c])	Copies the values from ([a]) for ([c]) words to ([b]) for ([c]) words respectively.
		Character string copy	STRCUT ([a], [b], [c], [d])	Copies character string.
		Character number count	STRLEN ([a])	Returns the number of characters for character string.
		Character string concatenation	STRCAT ([a], [b])	Concatenates character string.
		Character string search	STRStr. ([a], [b])	Search character string.
Draw (Note 1)	Drawing of straight line	LINE ([a], [b], [c], [d])	Draws a straight line connecting the start coordinate and end coordinate.	
	Drawing of rectangle	RECTANGLE ([a], [b], [c], [d])	Rectangle with left top corner as start coordinate and bottom right corner as end coordinate is drawn. Draws a rectangle with left top corner as start coordinate and bottom right corner as end coordinate.	
	Drawing of circle and ellipse	CIRCLE ([a], [b], [c], [d])	Draws a circle with specified radius from the center coordinate.	
Offset	Indirect specification	OFFSET ([a], [b])	Specifies the device words ([b]) from ([a]).	
Bit device ↔ word device Cross Operator Functions (Note 2)	Bit device (1 word length) to bit device (1 word length)	BITS2BITS ([a], [b])	Copy 1 word from bit devices to bit devices.	
	Bit device (1 word length) to Word device	BITS2WORD ([a], [b])	Copy 1 word from bit devices to a word devices.	
	Word device to bit device (1 word length)	WORD2BITS ([a], [b])	Copy 1 word from a word device to bit devices.	

Note 1: Touch (WindO/I-NV3) only

Note 2: Pro/Lite (WindLDR)